



Figure 1

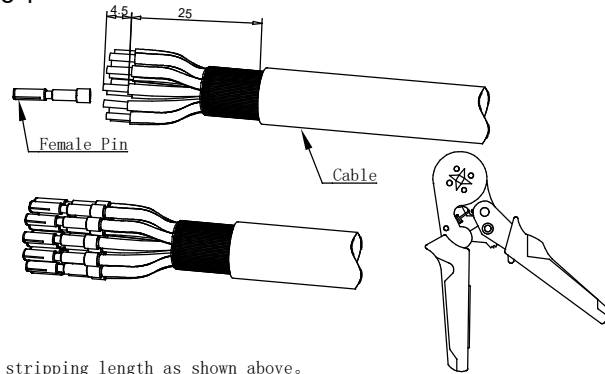


1. Cable stripping length as shown above.
2. Use a crimping tool to crimp the cable and female pin.

Figure 2

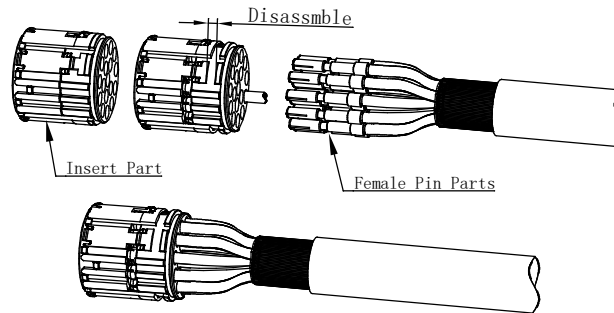


1. Disassemble the Insert Part.
2. Insert the crimped female pin into the Insert Part. Ensure that the pin is pressed in correctly and can be lightly buckled into place.

Figure 3

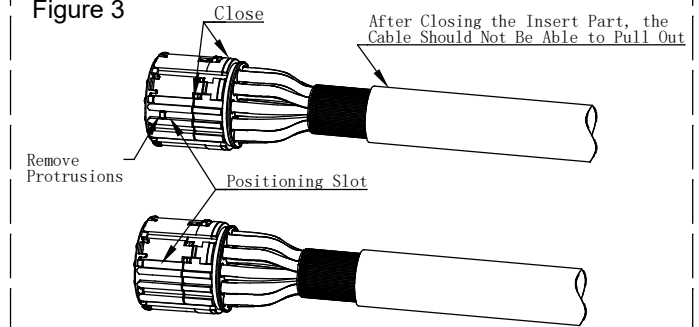


1. After all the pins are installed, close the Insert Part. After closing, the cable should not be able to pull out.
2. Remove the protrusions in the positioning slot, ensuring to only remove the protrusions from the slot that will be used.

Figure 4

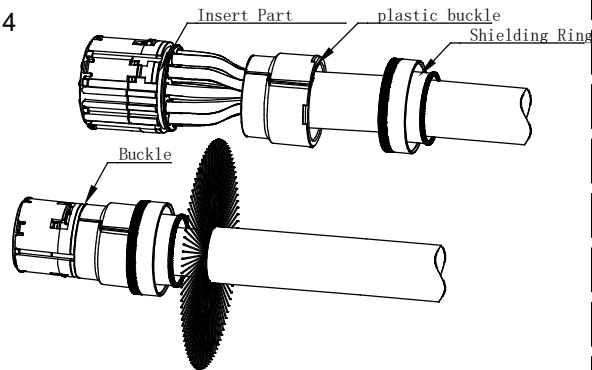


1. Attach the plastic buckle to the Insert Part, then buckle the ring onto the plastic buckle.
2. Organize the shielding wire as shown above.

Figure 5

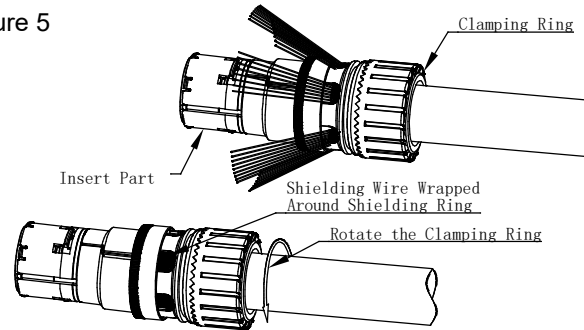

1. Use the clamping ring to divide the shielding wire into 4-6 groups, then secure the clamping ring onto the shielding ring.
2. Rotate the clamping ring to wrap the shielding wire around the shielding ring.

Figure 6

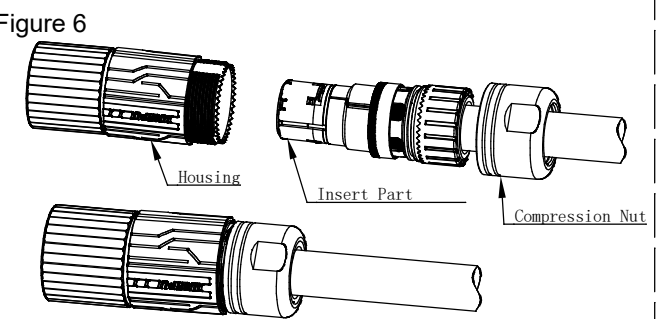

1. Align the assembled Insert&Cable Part and install them into the Housing, then tighten with the compression nut using a torque of 4-6N.
2. The final installation will be as shown in the diagram above.