


IP67

03

- SA Series IP67
- Push-pull coupling

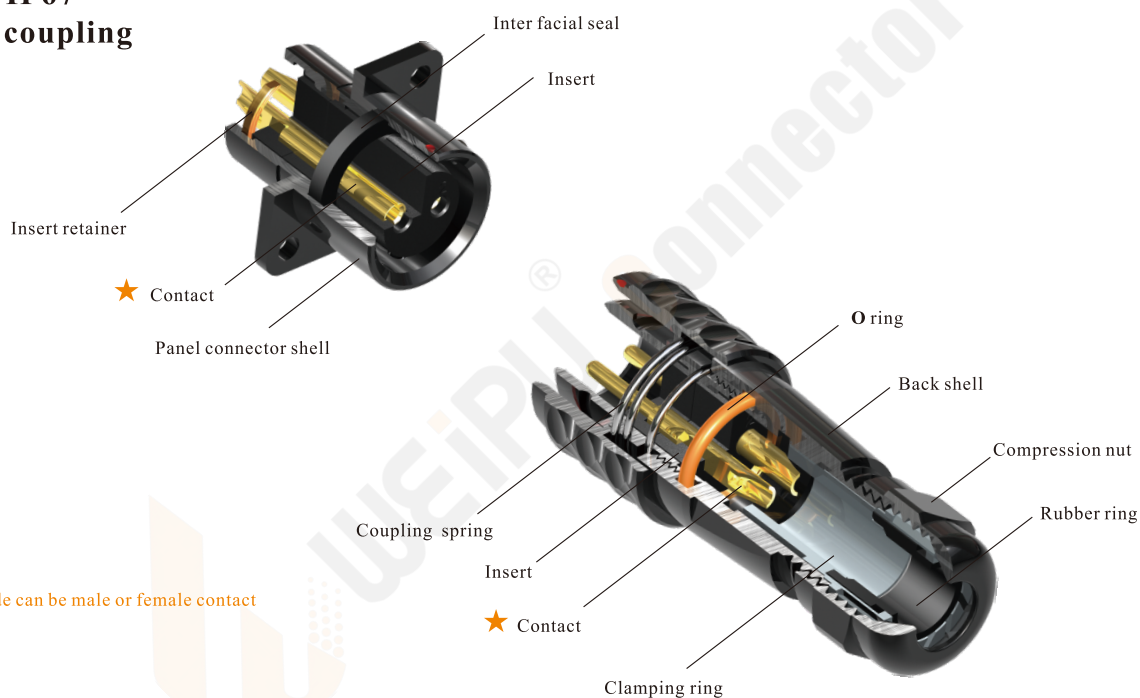

★ Each side can be male or female contact

Material and spec

Coupling	Push-pull
Shell material	Anodized aluminium
Insert material	PPS, max temperature 260 °C
Contact material	Brass with gold plating
Termination	Solder: SA6, SA8, SA10, SA12, SA16, SA20, SA24, SA28 Crimp: SA16, SA20, SA24, SA28 Screw: SA20, SA24, SA28
Cable outer diameter range	SA6: I:2-3mm, II:3-4mm SA12: I: 4-6.5mm , II: 5-8mm SA24:10-14mm SA8: I:3-4mm, II:4-5mm SA16: I: 5-8mm , II: 8-12mm SA28:I:9-13mm, II:13-16mm SA10:I:3-4mm, II:4-6.5mm SA20: I: 5-9mm, II: 8-12mm
IP rating	IP67
Mating cycle	500, USB:1000
Temperature range	-40℃ ~ +85℃; SA24 Data: -20℃ ~ +70℃
Insulation resistance	2000 MΩ

SA
24

SA2413/S

★ Screw contact spec see P21

P03-08