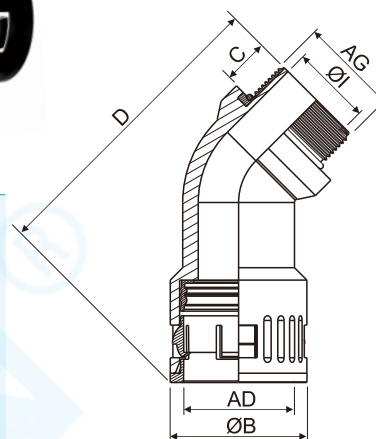


WQGM — Metal 45° Angle Hose Connector—Metric thread—Quick connection

CE RoHs **IP66**

Material: PA+Brass with Nickle plating

Seal: NBR

IP rating: IP66 with O-ring

Working temperature: -40°C to 100°C, or instantaneous up to 120°C;

Color: Black(RAL9005), Grey(RAL7037)

Fire resistance: UL94-V2

P/N	Thread Size	Hose Size	C mm	SW mm	ØB mm	D mm	Reference No. (Grey)	Reference No. (Black)	
WQG.M45.M16/AD15.8(B/G)	M16×1.5	AD15.8	12	23.2	12	57	9 00 082 0160 1	9 00 082 0160 2	50
WQG.M45.M20/AD15.8(B/G)	M20×1.5	AD15.8	12	23.2	12	57	9 00 082 0200 1	9 00 082 0200 2	50
WQG.M45.M20/AD21.2(B/G)	M20×1.5	AD21.2	17	29.7	13	72	9 00 082 0201 1	9 00 082 0201 2	25
WQG.M45.M32/AD34.5(B/G)	M32×1.5	AD34.5	30	44	14	99	9 00 082 0320 1	9 00 082 0320 2	48
WQG.M45.M40/AD34.5(B/G)	M40×1.5	AD34.5	30	44	14	99	9 00 082 0400 1	9 00 082 0400 2	48

Recommended accessories:



P22



P112




P118

WQGM — Metal 45° Angle Hose Connector–PG thread–Quick connection

CE RoHs **IP66**



Material: PA+Brass with Nickle plating
Seal: NBR
IP rating: IP66 with O-ring
Working temperature: -40℃ to 100℃, or instantaneous up to 120℃;
Color: Black(RAL9005), Grey(RAL7037)
Fire resistance: UL94-V2

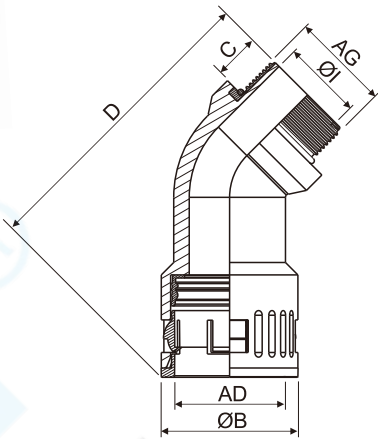

P/N	Thread Size	Hose Size	C mm	SW mm	ØB mm	D mm	Reference No. (Grey)	Reference No. (Black)	
WQG.M45.PG11/AD15.8(B/G)	PG11	AD15.8	12	23.2	12	38	9 00 082 1110 1	9 00 082 1110 2	50
WQG.M45.PG13.5/AD21.2(B/G)	PG13.5	AD21.2	17	29.7	13	45	9 00 082 1130 1	9 00 082 1130 2	25
WQG.M45.PG16/AD21.2(B/G)	PG16	AD21.2	17	29.7	13	45	9 00 082 1160 1	9 00 082 1160 2	25
WQG.M45.PG29/AD34.5(B/G)	PG29	AD34.5	26	44	13	52	9 00 082 1290 1	9 00 082 1290 2	36

Recommended accessories:



P23




P112



P118


DPJ — Metal Hose Connector—Metric thread

CE RoHS

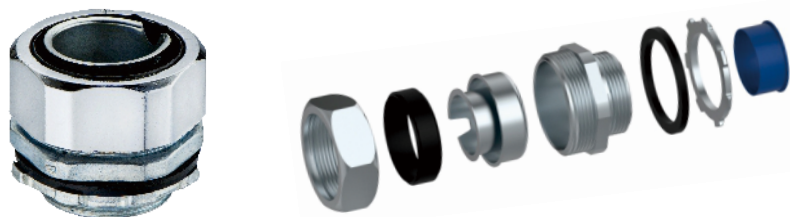

Material: Galvanized zinc alloy
 LockNuts: Zinc alloy with chrome plating
 Enlarger ring: TPE
 Sealing washer: Modified rubber
 Hose protection ring: Galvanized iron sheet
 Working temperature: -40°C to 105°C

Features: The hose connector comes with compact structure, is waterproofed and corrosion resistant. One end is connected to the metal hose, and the other end is connected to the box or equipment by the thread.

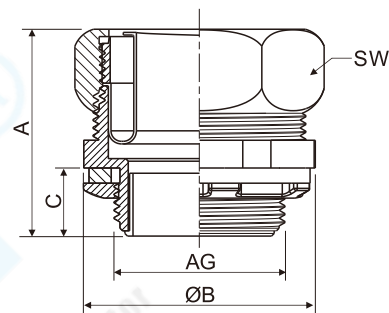

P/N	AG	Hose Size		C mm	ØB mm	A mm	Reference No.
		Metric ϕ	PG ϕ				
DPJ.8.M16	M16x1.5	Ø8	1/4"	8	25	26	9 00 091 0160 0
DPJ.10.M16	M16x1.5	Ø10	5/6"	8	25.6	30	9 00 091 0161 0
DPJ.12.M20	M20x1.5	Ø12	3/8"	10	28.5	32	9 00 091 0162 0
DPJ.15.M20	M20x1.5	Ø15	1/2"	10	33	34.5	9 00 091 0200 0
DPJ.15.M24	M24x1.5	Ø15	1/2"	10	33	34.5	9 00 091 0240 0
DPJ.20.M27	M27x2.0	Ø20	3/4"	12	39	39.5	9 00 091 0270 0
DPJ.20.M30	M30x2.0	Ø20	3/4"	12	39	39.5	9 00 091 0300 0
DPJ.25.M33	M33x2.0	Ø25	1"	12	42.5	42.5	9 00 091 0330 0
DPJ.25.M36	M36x2.0	Ø25	1"	12	42.5	42.5	9 00 091 0360 0
DPJ.32.M40	M40x1.5	Ø32	1 1/4"	14	57.5	46.5	9 00 091 0400 0
DPJ.32.M42	M42x2.0	Ø32	1 1/4"	14	57.5	46.5	9 00 091 0420 0
DPJ.32.M48	M48x2.0	Ø32	1 1/4"	14	57.5	46.5	9 00 091 0480 0
DPJ.38.M48	M48x2.0	Ø38	1 1/2"	14	62	51	9 00 091 0481 0
DPJ.38.M60	M60x2.0	Ø38	1 1/2"	14	62	51	9 00 091 0600 0
DPJ.51.M60	M60x2.0	Ø51	2"	15	77.5	57	9 00 091 0601 0
DPJ.51.M72	M72x2.0	Ø51	2"	15	77.5	57	9 00 091 0720 0
DPJ.64.M76	M76x2.0	Ø64	2 1/2"	20	95	66	9 00 091 0760 0
DPJ.75.M88	M88x2.0	Ø75	3"	22	108.5	68	9 00 091 0880 0


Recommended accessories:




P152

DPJ — Metal Hose Connector—G thread

CE RoHS

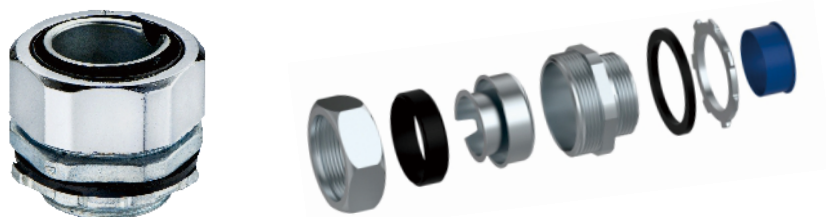

Material: Galvanized zinc alloy
 LockNuts: Zinc alloy with chrome plating
 Enlarger ring: TPE
 Sealing washer: Modified rubber
 Hose protection ring: Galvanized iron sheet
 Working temperature: -40°C to 105°C
 Features: The hose connector comes with compact structure, is waterproofed and corrosion resistant. One end is connected to the metal hose, and the other end is connected to the box or equipment by the thread.

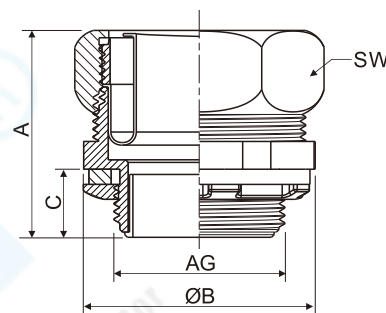

P/N	AG	Hose Size		C mm	ØB mm	A mm	Reference No.
		Metric ϕ	PG ϕ				
DPJ.6.G1/4	G1/4"	Ø8	1/4"	7	25.6	30	9 00 091 2020 0
DPJ.10.G3/8	G3/8"	Ø12	3/8"	10	28.5	32	9 00 091 2030 0
DPJ.15.G1/2	G1/2"	Ø15	1/2"	12	33	34.5	9 00 091 2040 0
DPJ.20.G3/4	G3/4"	Ø20	3/4"	12	39	39.5	9 00 091 2060 0
DPJ.25.G1	G1"	Ø25	1"	14	42.5	42.5	9 00 091 2080 0
DPJ.32.G1.1/4	G1-1/4"	Ø32	1 1/4"	14	57.5	46.5	9 00 091 2100 0
DPJ.38.G1.1/2	G1-1/2"	Ø38	1 1/2"	16	62	51	9 00 091 2120 0
DPJ.51.G2	G2"	Ø51	2"	16	77.5	57	9 00 091 2140 0
DPJ.64.G2.1/2	G2-1/2"	Ø64	2 1/2"	20	95	66	9 00 091 2160 0
DPJ.75.G3	G3"	Ø75	3"	22	108.5	68	9 00 091 2180 0

Recommended accessories:



P152


DPJ — Metal 90° Angle Hose Connector—G thread

CE RoHS



Material: Galvanized zinc alloy
 LockNuts: Zinc alloy with chrome plating
 Enlarger ring: TPE
 Sealing washer: Modified rubber
 Hose protection ring: Galvanized iron sheet
 Working temperature: -40°C to 105°C

Features: The hose connector comes with compact structure, is waterproofed and corrosion resistant. One end is connected to the metal hose, and the other end is connected to the box or equipment by the thread.

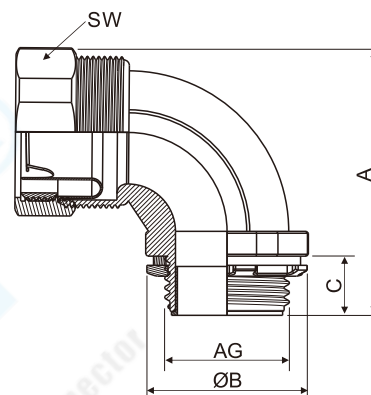

P/N	AG	Hose Size		C	ØB	A	Reference No.
		Metric ϕ	PG ϕ	mm	mm	mm	
DPJ90.12.G3/8	G3/8"	Ø12	3/8"	10	28	19	9 00 092 2030 0
DPJ90.15.G1/2	G1/2"	Ø15	1/2"	10	32.5	21	9 00 092 2040 0
DPJ90.20.G3/4	G3/4"	Ø20	3/4"	12	39	27	9 00 092 2060 0
DPJ90.25.G1	G1"	Ø25	1"	12	46.5	30	9 00 092 2080 0
DPJ90.32.G1.1/4	G1-1/4"	Ø32	1 1/4"	14	56.5	35	9 00 092 2100 0
DPJ90.38.G1.1/2	G1-1/2"	Ø38	1 1/2"	14	64	40	9 00 092 2120 0
DPJ90.51.G2	G2"	Ø51	2"	15	78	46	9 00 092 2140 0
DPJ90.64.G2.1/2	G2-1/2"	Ø64	2 1/2"	20	97	61	9 00 092 2160 0
DPJ90.75.G3	G3"	Ø75	3"	22	115	70	9 00 092 2180 0

Recommended accessories:




P152

DPJ — Metal 45° Angle Hose Connector—G thread

CE RoHS



Material: Galvanized zinc alloy
 LockNuts: Zinc alloy with chrome plating
 Enlarger ring: TPE
 Sealing washer: Modified rubber
 Hose protection ring: Galvanized iron sheet
 Working temperature: -40°C to 105°C
 Features: The hose connector comes with compact structure, is waterproofed and corrosion resistant. One end is connected to the metal hose, and the other end is connected to the box or equipment by the thread.

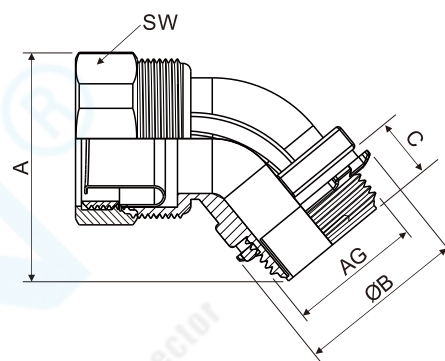

P/N	AG	Hose Size		C mm	ØB mm	A mm	Reference No.
		Metric ϕ	PG ϕ				
DPJ45.12.G3/8	G3/8"	Ø12	3/8"	11.5	28	25	9 00 093 2030 0
DPJ45.15.G1/2	G1/2"	Ø15	1/2"	11.5	32.5	31	9 00 093 2040 0
DPJ45.20.G3/4	G3/4"	Ø20	3/4"	15	39	40	9 00 093 2060 0
DPJ45.25.G1	G1"	Ø25	1"	16	46.5	47	9 00 093 2080 0
DPJ45.32.G1.1/4	G1-1/4"	Ø32	1 1/4"	17	56.5	52	9 00 093 2100 0
DPJ45.38.G1.1/2	G1-1/2"	Ø38	1 1/2"	18	64	62	9 00 093 2120 0
DPJ45.51.G2	G2"	Ø51	2"	20	78	75	9 00 093 2140 0
DPJ45.64.G2.1/2	G2-1/2"	Ø64	2 1/2"	26	97	90	9 00 093 2160 0
DPJ45.75.G3	G3"	Ø75	3"	28	115	105	9 00 093 2180 0


Recommended accessories:




P152

DPJ — Metal Female Threaded Hose Connector—G thread

CE RoHS

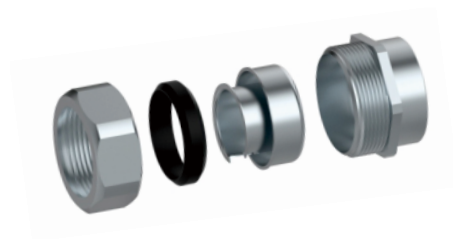

Material: Galvanized zinc alloy
LockNuts: Zinc alloy with chrome plating
Enlarger ring: TPE
Sealing washer: Modified rubber
Hose protection ring: Galvanized iron sheet
Working temperature: -40°C to 105°C
Features: The hose connector comes with compact structure, is waterproofed and corrosion resistant. One end is connected to the metal hose, and the other end is connected to the box or equipment by the thread.

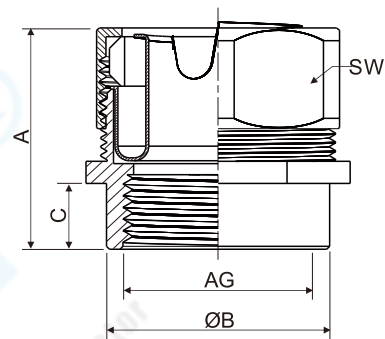

P/N	AG	Hose Size		C mm	ØB mm	A mm	Reference No.
		Metric φ	PG φ				
DPJ.IT.12.G3/8	G3/8"	Ø12	3/8"	10	28.5	32	9 00 094 2030 0
DPJ.IT.15.G1/2	G1/2"	Ø15	1/2"	10	33	35	9 00 094 2040 0
DPJ.IT.20.G3/4	G3/4"	Ø20	3/4"	12	39	38	9 00 094 2060 0
DPJ.IT.25.G1	G1"	Ø25	1"	12	42.5	41	9 00 094 2080 0
DPJ.IT.32.G1.1/4	G1 1/4"	Ø32	1 1/4"	14	57.5	44	9 00 094 2100 0
DPJ.IT.38.G1.1/2	G1 1/2"	Ø38	1 1/2"	14	62	47	9 00 094 2120 0
DPJ.IT.51.G2	G2"	Ø51	2"	15	77.5	57	9 00 094 2140 0
DPJ.IT.64.G2.1/2	G2 1/2"	Ø64	2 1/2"	20	95	65	9 00 094 2160 0
DPJ.IT.75.G3	G3"	Ø75	3"	22	108.5	75	9 00 094 2180 0


Recommended accessories:




P152

DPJ — Metal Hose Connector with screw-G thread

CE RoHS



Material: Galvanized zinc alloy
 LockNuts: Zinc alloy with chrome plating
 Enlarger ring: TPE
 Sealing washer: Modified rubber
 Hose protection ring: Galvanized iron sheet
 Working temperature: -40°C to 105°C
 Features: The hose connector comes with compact structure, is waterproofed and corrosion resistant. One end is connected to the metal hose, and the other end is connected to the box or equipment by the thread.

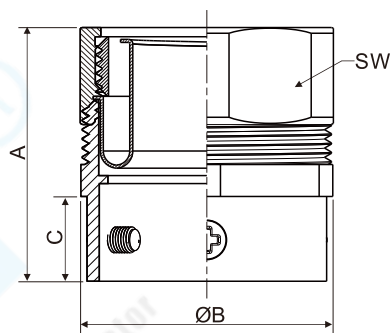

P/N	Hose Size		C mm	ØB mm	A mm	Reference No.
	Metric ϕ	PG ϕ				
DPJ.CS.12.G3/8	Ø12	3/8"	11.5	28.5	32	9 00 095 6120 0
DPJ.CS.15.G1/2	Ø15	1/2"	13	33	35	9 00 095 6150 0
DPJ.CS.20.G3/4	Ø20	3/4"	15	39	40	9 00 095 6200 0
DPJ.CS.25.G1	Ø25	1"	16	42.5	40.5	9 00 095 6250 0
DPJ.CS.32.G1.1/4	Ø32	1 1/4"	18	57.5	47	9 00 095 6320 0
DPJ.CS.38.G1.1/2	Ø38	1 1/2"	20	62	49	9 00 095 6380 0
DPJ.CS.51.G2	Ø51	2"	24	77.5	57	9 00 095 6510 0
DPJ.CS.64.G2.1/2	Ø64	2 1/2"	28	95	70	9 00 095 6640 0
DPJ.CS.75.G3	Ø75	3"	32	108.5	74	9 00 095 6750 0


Recommended accessories:




P152

DPJ — Metal Hose Connector with circlip-G thread

CE RoHS

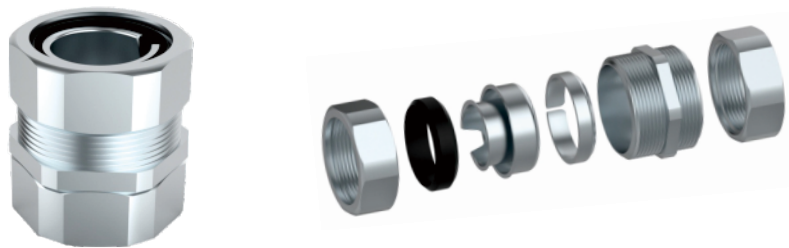

Material: Galvanized zinc alloy
LockNuts: Zinc alloy with chrome plating
Enlarger ring: TPE
Sealing washer: Modified rubber
Hose protection ring: Galvanized iron sheet
Working temperature: -40°C to 105°C
Features: The hose connector comes with compact structure, is waterproofed and corrosion resistant. One end is connected to the metal hose, and the other end is connected to the box or equipment by the thread.

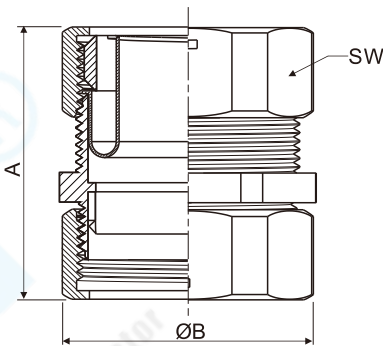


P/N	Hose Size		ØB mm	A mm	Reference No.
	Metric ϕ	PG ϕ			
DPJ.JR.10.G1/4	Ø10	5/6"	25.6	38	9 00 096 6100 0
DPJ.JR.12.G3/8	Ø12	3/8"	28.5	40	9 00 096 6120 0
DPJ.JR.15.G1/2	Ø15	1/2"	33	43	9 00 096 6150 0
DPJ.JR.20.G3/4	Ø20	3/4"	39	47	9 00 096 6200 0
DPJ.JR.25.G1	Ø25	1"	42.5	48	9 00 096 6250 0
DPJ.JR.32.G1.1/4	Ø32	1 1/4"	57.5	54	9 00 096 6320 0
DPJ.JR.38.G1.1/2	Ø38	1 1/2"	62	56	9 00 096 6380 0
DPJ.JR.51.G2	Ø51	2"	77.5	65	9 00 096 6510 0
DPJ.JR.64.G2.1/2	Ø64	2 1/2"	95	82	9 00 096 6640 0
DPJ.JR.75.G3	Ø75	3"	108.5	85	9 00 096 6750 0

Recommended accessories:




P152

DPJY — Metal Y-Shape Hose Connector

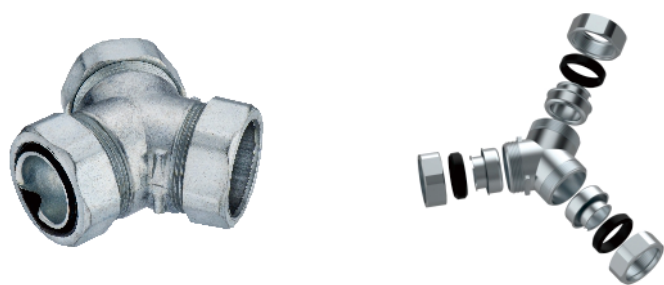CE RoHs **IP66**

Material: Main Part – Galvanized zinc alloy
 Sealing washer: NBR
 Hose protection ring: Galvanized iron sheet
 Working temperature: -40°C to 105°C
 IP rating: IP66

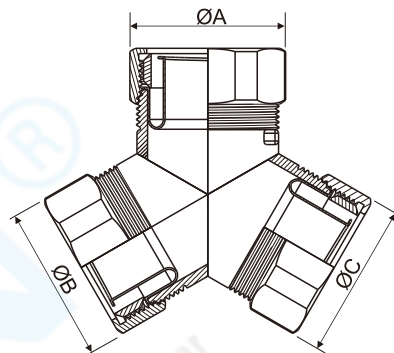

P/N	Hose Size		Reference No.
	Metric ϕ	PG ϕ	
DPJY.121212	Ø12/Ø12/Ø12	3/8".3/8".3/8"	9 00 097 6120 0
DPJY.121215	Ø12/Ø12/Ø15	3/8".3/8".1/2"	9 00 097 6121 0
DPJY.121515	Ø12/Ø15/Ø15	3/8".1/2".1/2"	9 00 097 6122 0
DPJY.121520	Ø12/Ø15/Ø20	3/8".1/2".3/4"	9 00 097 6123 0
DPJY.151515	Ø15/Ø15/Ø15	1/2".1/2".1/2"	9 00 097 6150 0
DPJY.151520	Ø15/Ø15/Ø20	1/2".1/2".3/4"	9 00 097 6151 0
DPJY.151525	Ø15/Ø15/Ø25	1/2".1/2".1"	9 00 097 6152 0
DPJY.152025	Ø15/Ø20/Ø25	1/2".3/4".1"	9 00 097 6153 0
DPJY.152525	Ø15/Ø25/Ø25	1/2".1".1"	9 00 097 6154 0
DPJY.152532	Ø15/Ø25/Ø32	1/2".1".1 1/4"	9 00 097 6155 0
DPJY.202020	Ø20/Ø20/Ø20	3/4".3/4".3/4"	9 00 097 6201 0
DPJY.202025	Ø20/Ø20/Ø25	3/4".3/4".1"	9 00 097 6202 0
DPJY.202532	Ø20/Ø25/Ø32	3/4".1".1 1/4"	9 00 097 6203 0
DPJY.252525	Ø25/Ø25/Ø25	1".1".1"	9 00 097 6250 0
DPJY.252532	Ø25/Ø25/Ø32	1".1".1 1/4"	9 00 097 6251 0
DPJY.253232	Ø25/Ø32/Ø32	1".1 1/4".1 1/4"	9 00 097 6252 0
DPJY.253238	Ø25/Ø32/Ø38	1".1 1/4".1 1/2"	9 00 097 6253 0
DPJY.253838	Ø25/Ø38/Ø38	1".1 1/2".1 1/2"	9 00 097 6254 0

Recommended accessories:



P152