


HSK — Plastic Cable Gland – Metric thread

CE RoHS **IP68**

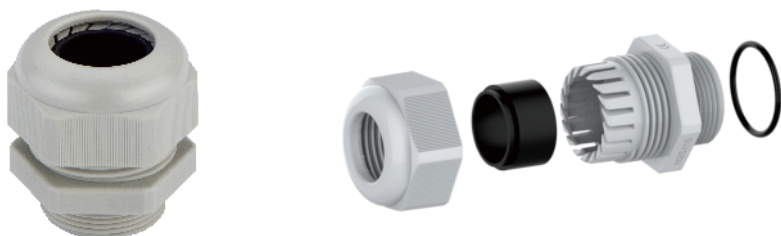

Material: PA


Seal: NBR

IP rating: IP68 with specified mating threads and O-ring

Working temperature: -40°C to 100°C in static state, or instantaneous up to 120°C; -20°C to 80°C in dynamic state, or instantaneous up to 100°C

Color: Black(RAL9005), Grey(RAL7037)

Fire resistance: UL94-V2



P/N	Thread Size	Cable OD mm	AG mm	GL mm	H mm	SW mm	Reference No. (Grey)	Reference No. (Black)	
HSK.M12.A(B/G)	M12X1.5	2-5	12	8	20	15	9 00 001 0120 1	9 00 001 0120 2	50
HSK.M12.B(B/G)	M12X1.5	3-6.5	12	8	20	15	9 00 001 0121 1	9 00 001 0121 2	50
HSK.M16.A(B/G)	M16X1.5	2-6	16	8	22	19	9 00 001 0160 1	9 00 001 0160 2	50
HSK.M16.B(B/G)	M16X1.5	4-8	16	8	22	19	9 00 001 0161 1	9 00 001 0161 2	50
HSK.M20.A(B/G)	M20X1.5	5-10	20	9	26.5	24	9 00 001 0200 1	9 00 001 0200 2	50
HSK.M20.B(B/G)	M20X1.5	6-12	20	9	26.5	24	9 00 001 0201 1	9 00 001 0201 2	50
HSK.M22.A(B/G)	M22X1.5	6-12	22	10	28	27	9 00 001 0220 1	9 00 001 0220 2	50
HSK.M22.B(B/G)	M22X1.5	10-14	22	10	28	27	9 00 001 0221 1	9 00 001 0221 2	50
HSK.M25.A(B/G)	M25X1.5	9-16	25	11	31.5	33	9 00 001 0250 1	9 00 001 0250 2	20
HSK.M25.B(B/G)	M25X1.5	13-18	25	11	31.5	33	9 00 001 0251 1	9 00 001 0251 2	20
HSK.M32.A(B/G)	M32X1.5	13-20	32	11	39	42	9 00 001 0320 1	9 00 001 0320 2	20
HSK.M32.B(B/G)	M32X1.5	18-25	32	11	39	42	9 00 001 0321 1	9 00 001 0321 2	20
HSK.M40.A(B/G)	M40X1.5	20-26	40	13	48.5	53	9 00 001 0400 1	9 00 001 0400 2	10
HSK.M40.B(B/G)	M40X1.5	22-32	40	13	48.5	53	9 00 001 0401 1	9 00 001 0401 2	10
HSK.M50.A(B/G)	M50X1.5	25-31	50	13	47.3	60	9 00 001 0500 1	9 00 001 0500 2	5
HSK.M50.B(B/G)	M50X1.5	32-38	50	13	47.3	60	9 00 001 0501 1	9 00 001 0501 2	5
HSK.M63.A(B/G)	M63X1.5	29-35	63	14	47	68	9 00 001 0630 1	9 00 001 0630 2	5
HSK.M63.B(B/G)	M63X1.5	37-44	63	14	47	68	9 00 001 0631 1	9 00 001 0631 2	5

Recommended accessories:



P22



P112

HSK — Plastic Cable Gland – PG thread



CE RoHS **IP68**

Material: PA


Seal: NBR

IP rating: IP68 with specified mating threads and O-ring

Working temperature: -40°C to 100°C in static state, or instantaneous up to 120°C; -20°C to 80°C in dynamic state, or instantaneous up to 100°C

Color: Black(RAL9005), Grey(RAL7037)

Fire resistance: UL94-V2



P/N	Thread Size	Cable OD mm	AG mm	GL mm	H mm	SW mm	Reference No. (Grey)	Reference No. (Black)	
HSK.PG7.A(B/G)	PG7	2-5	12.5	8	20	15	9 00 001 1070 1	9 00 001 1070 2	50
HSK.PG7.B(B/G)	PG7	3-6.5	12.5	8	20	15	9 00 001 1071 1	9 00 001 1071 2	50
HSK.PG9.A(B/G)	PG9	2-6	15.2	8	22	19	9 00 001 1090 1	9 00 001 1090 2	50
HSK.PG9.B(B/G)	PG9	4-8	15.2	8	22	19	9 00 001 1091 1	9 00 001 1091 2	50
HSK.PG11(B/G)	PG11	3-7	18.6	8	25	22	9 00 001 1110 1	9 00 001 1110 2	50
HSK.PG13.5.A(B/G)	PG13.5	5-10	20.4	9	26.5	24	9 00 001 1130 1	9 00 001 1130 2	50
HSK.PG13.5.B(B/G)	PG13.5	6-12	20.4	9	26.5	24	9 00 001 1131 1	9 00 001 1131 2	50
HSK.PG16.A(B/G)	PG16	7-12	22.5	10	28	27	9 00 001 1160 1	9 00 001 1160 2	50
HSK.PG16.B(B/G)	PG16	10-14	22.5	10	28	27	9 00 001 1161 1	9 00 001 1161 2	50
HSK.PG21.A(B/G)	PG21	9-16	28.3	11	31.5	33	9 00 001 1210 1	9 00 001 1210 2	20
HSK.PG21.B(B/G)	PG21	13-18	28.3	11	31.5	33	9 00 001 1211 1	9 00 001 1211 2	20
HSK.PG29.A(B/G)	PG29	13-20	37	11	39	42	9 00 001 1290 1	9 00 001 1290 2	20
HSK.PG29.B(B/G)	PG29	18-25	37	11	39	42	9 00 001 1291 1	9 00 001 1291 2	20
HSK.PG36.A(B/G)	PG36	20-26	47	13	48.5	53	9 00 001 1360 1	9 00 001 1360 2	10
HSK.PG36.B(B/G)	PG36	22-32	47	13	48.5	53	9 00 001 1361 1	9 00 001 1361 2	10
HSK.PG42.A(B/G)	PG42	25-31	54	13	47.3	60	9 00 001 1420 1	9 00 001 1420 2	5
HSK.PG42.B(B/G)	PG42	32-38	54	13	47.3	60	9 00 001 1421 1	9 00 001 1421 2	5
HSK.PG48.A(B/G)	PG48	29-35	59.3	14	47	68	9 00 001 1480 1	9 00 001 1480 2	5
HSK.PG48.B(B/G)	PG48	37-44	59.3	14	47	68	9 00 001 1481 1	9 00 001 1481 2	5

Recommended accessories:



P23




P112

HSK — Plastic Cable Gland – NPT thread

CE RoHs **IP68**



Material: PA
Seal: NBR
IP rating: IP68 with specified mating threads and O-ring
Working temperature: -40°C to 100°C in static state, or instantaneous up to 120°C; -20°C to 80°C in dynamic state, or instantaneous up to 100°C
Color: Black(RAL9005), Grey(RAL7037)
Fire resistance: UL94-V2



P/N	Thread Size	Øk Cable OD mm	AG mm	GL mm	H mm	SW mm	Reference No. (Grey)	Reference No. (Black)	
HSK.NPT3/8 (B/G)	NPT3/8"	4-8	17.06	11	26.5	22	9 00 001 3040 1	9 00 001 3040 2	100
HSK.NPT1/2 (B/G)	NPT1/2"	6-12	21.23	14	26.5	24	9 00 001 3050 1	9 00 001 3050 2	100
HSK.NPT3/4 (B/G)	NPT3/4"	13-18	26.57	14	31	33	9 00 001 3060 1	9 00 001 3060 2	50
HSK.NPT1 (B/G)	NPT1"	18-25	33.23	11	39	42	9 00 001 3070 1	9 00 001 3070 2	50
HSK.NPT1.1/4 (B/G)	NPT1-1/4"	22-32	41.99	13	47	52	9 00 001 3080 1	9 00 001 3080 2	25
HSK.NPT1.1/2 (B/G)	NPT1-1/2"	32-38	48.05	16	47	60	9 00 001 3090 1	9 00 001 3090 2	25
HSK.NPT2 (B/G)	NPT2"	37-44	60.09	16	47	65	9 00 001 3100 1	9 00 001 3100 2	25

Recommended accessories:



P112

HSK — Plastic Cable Gland – G Type thread

CE RoHS **IP68**



Material: PA


Seal: NBR

IP rating: IP68 with specified mating threads and O-ring

Working temperature: -40°C to 100°C in static state, or instantaneous up to 120°C; -20°C to 80°C in dynamic state, or instantaneous up to 100°C

Color: Black(RAL9005), Grey(RAL7037)

Fire resistance: UL94-V2



P/N	Thread Size	Øk Cable OD mm	AG mm	GL mm	H mm	SW mm	Reference No. (Grey)	Reference No. (Black)	
HSK.G1/4(B/G)	G1/4"	3-6.5	13.15	8	20	15	9 00 001 2020 1	9 00 001 2020 2	100
HSK.G3/8(B/G)	G3/8"	4-8	16.66	11	26.5	22	9 00 001 2030 1	9 00 001 2030 2	100
HSK.G1/2(B/G)	G1/2"	6-12	21.00	14	26.5	24	9 00 001 2040 1	9 00 001 2040 2	100
HSK.G3/4(B/G)	G3/4"	13-18	26.44	14	31	33	9 00 001 2060 1	9 00 001 2060 2	50
HSK.G1(B/G)	G1"	18-25	33.25	11	39	42	9 00 001 2080 1	9 00 001 2080 2	50
HSK.G1.1/4(B/G)	G1-1/4"	22-32	41.91	13	47	52	9 00 001 2100 1	9 00 001 2100 2	25
HSK.G1.1/2(B/G)	G1-1/2"	32-38	47.80	16	47	60	9 00 001 2120 1	9 00 001 2120 2	25
HSK.G2(B/G)	G2"	37-44	59.61	16	47	65	9 00 001 2140 1	9 00 001 2140 2	25

Recommended accessories:



P24



P112

HSK — Plastic Cable Gland – Metric thread Lengthen Type

CE RoHS **IP68**



Material: PA


Seal: NBR

IP rating: IP68 with specified mating threads and O-ring

Working temperature: -40°C to 100°C in static state, or instantaneous up to 120°C; -20°C to 80°C in dynamic state, or instantaneous up to 100°C

Color: Black(RAL9005), Grey(RAL7037)

Fire resistance: UL94-V2

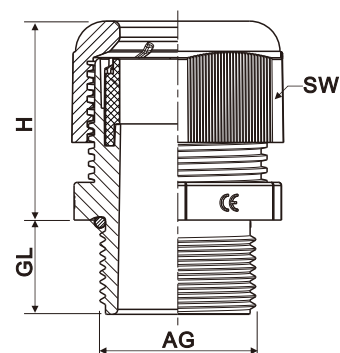

P/N	Thread Size	Ø Cable OD mm	AG mm	GL mm	H mm	SW mm	Reference No. (Grey)	Reference No. (Black)	
HSK.L.M12(B/G)	M12X1.5	3-6.5	12	15	20	15	9 00 002 0120 1	9 00 002 0120 2	50
HSK.L.M16.A(B/G)	M16X1.5	2-6	16	15	22	19	9 00 002 0160 1	9 00 002 0160 2	50
HSK.L.M16.B(B/G)	M16X1.5	4-8	16	15	22	19	9 00 002 0161 1	9 00 002 0161 2	50
HSK.L.M20.A(B/G)	M20X1.5	5-10	20	15	26.5	24	9 00 002 0200 1	9 00 002 0200 2	50
HSK.L.M20.B(B/G)	M20X1.5	6-12	20	15	26.5	24	9 00 002 0201 1	9 00 002 0201 2	50
HSK.L.M22.A(B/G)	M22X1.5	6-12	22	15	28	27	9 00 002 0220 1	9 00 002 0220 2	50
HSK.L.M22.B(B/G)	M22X1.5	10-14	22	15	28	27	9 00 002 0221 1	9 00 002 0221 2	50
HSK.L.M25.A(B/G)	M25X1.5	9-16	25	15	31.5	33	9 00 002 0250 1	9 00 002 0250 2	20
HSK.L.M25.B(B/G)	M25X1.5	13-18	25	15	31.5	33	9 00 002 0251 1	9 00 002 0251 2	20
HSK.L.M32.A(B/G)	M32X1.5	13-20	32	15	39	42	9 00 002 0320 1	9 00 002 0320 2	20
HSK.L.M32.B(B/G)	M32X1.5	18-15	32	15	39	42	9 00 002 0321 1	9 00 002 0321 2	20
HSK.L.M40(B/G)	M40X1.5	22-32	40	18	48.5	53	9 00 002 0400 1	9 00 002 0400 2	10
HSK.L.M50.A(B/G)	M50X1.5	25-31	50	18	47.3	60	9 00 002 0500 1	9 00 002 0500 2	5
HSK.L.M50.B(B/G)	M50X1.5	32-38	50	18	47.3	60	9 00 002 0501 1	9 00 002 0501 2	5
HSK.L.M63.A(B/G)	M63X1.5	29-35	63	18	47	68	9 00 002 0630 1	9 00 002 0630 2	5
HSK.L.M63.B(B/G)	M63X1.5	37-44	63	18	47	68	9 00 002 0631 1	9 00 002 0631 2	5

Recommended accessories:



P22



P112

HSK — Plastic Cable Gland – PG thread Lengthen Type



CE RoHS **IP68**

Material: PA


Seal: NBR

IP rating: IP68 with specified mating threads and O-ring

Working temperature: -40°C to 100°C in static state, or instantaneous up to 120°C; -20°C to 80°C in dynamic state, or instantaneous up to 100°C

Color: Black(RAL9005), Grey(RAL7037)

Fire resistance: UL94-V2

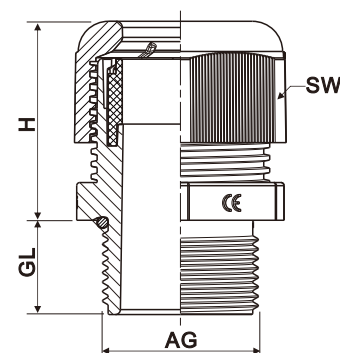

P/N	Thread Size	Øk Cable OD mm	AG mm	GL mm	H mm	SW mm	Reference No. (Grey)	Reference No. (Black)	
HSK.L.PG7(B/G)	PG7	3-6.5	12.5	15	20	15	9 00 002 1070 1	9 00 002 1070 2	50
HSK.L.PG9.A(B/G)	PG9	2-6	15.2	15	22	19	9 00 002 1090 1	9 00 002 1090 2	50
HSK.L.PG9.B(B/G)	PG9	4-8	15.2	15	22	19	9 00 002 1091 1	9 00 002 1091 2	50
HSK.L.PG11(B/G)	PG11	3-7	18.6	15	25	22	9 00 002 1110 1	9 00 002 1110 2	50
HSK.L.PG13.5.A(B/G)	PG13.5	5-10	20.4	15	26.5	24	9 00 002 1130 1	9 00 002 1130 2	50
HSK.L.PG13.5.B(B/G)	PG13.5	6-12	20.4	15	26.5	24	9 00 002 1131 1	9 00 002 1131 2	50
HSK.L.PG16.A(B/G)	PG16	7-12	22.5	15	28	27	9 00 002 1160 1	9 00 002 1160 2	50
HSK.L.PG16.B(B/G)	PG16	10-14	22.5	15	28	27	9 00 002 1161 1	9 00 002 1161 2	50
HSK.L.PG21.A(B/G)	PG21	9-16	28.3	15	31.5	33	9 00 002 1210 1	9 00 002 1210 2	20
HSK.L.PG21.B(B/G)	PG21	13-18	28.3	15	31.5	33	9 00 002 1211 1	9 00 002 1211 2	20
HSK.L.PG29.A(B/G)	PG29	13-20	37	15	39	42	9 00 002 1290 1	9 00 002 1290 2	20
HSK.L.PG29.B(B/G)	PG29	18-25	37	15	39	42	9 00 002 1291 1	9 00 002 1291 2	20
HSK.L.PG36.A(B/G)	PG36	20-26	47	18	48.5	53	9 00 002 1360 1	9 00 002 1360 2	10
HSK.L.PG36.B(B/G)	PG36	25-32	47	18	48.5	53	9 00 002 1361 1	9 00 002 1361 2	10
HSK.L.PG42.A(B/G)	PG42	25-31	54	18	47.3	60	9 00 002 1420 1	9 00 002 1420 2	5
HSK.L.PG42.B(B/G)	PG42	30-38	54	18	47.3	60	9 00 002 1421 1	9 00 002 1421 2	5
HSK.L.PG48.A(B/G)	PG48	29-35	59.3	18	47	68	9 00 002 1480 1	9 00 002 1480 2	5
HSK.L.PG48.B(B/G)	PG48	37-44	59.3	18	47	68	9 00 002 1481 1	9 00 002 1481 2	5

Recommended accessories:



P23



P112

HSK — Plastic Cable Glands–Metric thread Multiple–entry Type

CE RoHS **IP65**



Material: PA


Seal: NBR

IP rating: IP65 (up to IP68 only when wire size = Mounting hole size)

Working temperature: -40°C to 100°C in static state, or instantaneous up to 120°C; -20°C to 80°C in dynamic state, or instantaneous up to 100°C

Color: Black(RAL9005), Grey(RAL7037)

Fire resistance: UL94-V2



P/N	Thread Size	No. of Cables x cable ϕ mm	AG mm	GL mm	H mm	SW mm	Reference No. (Grey)	Reference No. (Black)	
HSK.MU.M16(B/G)	M16X1.5	4X1.4	16	8	22	19	9 00 003 0160 1	9 00 003 0160 2	50
HSK.MU.M20.A(B/G)	M20X1.5	2X5	20	9	26.5	24	9 00 003 0200 1	9 00 003 0200 2	50
HSK.MU.M20.B(B/G)	M20X1.5	6X3	20	9	26.5	24	9 00 003 0201 1	9 00 003 0201 2	50
HSK.MU.M20.C(B/G)	M20X1.5	3X4	20	9	26.5	24	9 00 003 0202 1	9 00 003 0202 2	50
HSK.MU.M22.A(B/G)	M22X1.5	2X6	22	10	28	27	9 00 003 0220 1	9 00 003 0220 2	50
HSK.MU.M22.B(B/G)	M22X1.5	7X3	22	10	28	27	9 00 003 0221 1	9 00 003 0221 2	50
HSK.MU.M22.C(B/G)	M22X1.5	4X4	22	10	28	27	9 00 003 0222 1	9 00 003 0222 2	50
HSK.MU.M22.D(B/G)	M22X1.5	6X4	22	10	28	27	9 00 003 0223 1	9 00 003 0223 2	50
HSK.MU.M25.A(B/G)	M25X1.5	4X6	25	11	31.5	33	9 00 003 0250 1	9 00 003 0250 2	20
HSK.MU.M25.B(B/G)	M25X1.5	3X7	25	11	31.5	33	9 00 003 0251 1	9 00 003 0251 2	20
HSK.MU.M32.A(B/G)	M32X1.5	10X6	32	11	39	42	9 00 003 0320 1	9 00 003 0320 2	20
HSK.MU.M32.B(B/G)	M32X1.5	4X9	32	11	39	42	9 00 003 0321 1	9 00 003 0321 2	20
HSK.MU.M32.C(B/G)	M32X1.5	6X6.5	32	11	39	42	9 00 003 0322 1	9 00 003 0322 2	20
HSK.MU.M40.A(B/G)	M40X1.5	2X15	40	13	48.5	53	9 00 003 0400 1	9 00 003 0400 2	10
HSK.MU.M40.B(B/G)	M40X1.5	3X10	40	13	48.5	53	9 00 003 1361 1	9 00 003 1361 2	10
HSK.MU.M40.C(B/G)	M40X1.5	9X7	40	13	48.5	53	9 00 003 0401 1	9 00 003 0401 2	10
HSK.MU.M50.A(B/G)	M50X1.5	4X12	50	13	47.3	60	9 00 003 0500 1	9 00 003 0500 2	10
HSK.MU.M50.B(B/G)	M50X1.5	3X15	50	13	47.3	60	9 00 003 0501 1	9 00 003 0501 2	10
HSK.MU.M63.B(B/G)	M63X1.5	6X12	63	14	47	68	9 00 003 0631 1	9 00 003 0631 2	5
HSK.MU.M63.C(B/G)	M63X1.5	3X18	63	14	47	68	9 00 003 0632 1	9 00 003 0632 2	5

Recommended accessories:



P22



P112

HSK — Plastic Cable Glands—PG thread Multiple-entry Type

CE RoHs **IP65**



Material: PA


Seal: NBR

IP rating: IP65 (up to IP68 only when wire size = Mounting hole size)

Working temperature: -40°C to 100°C in static state, or instantaneous up to 120°C; -20°C to 80°C in dynamic state, or instantaneous up to 100°C

Color: Black(RAL9005), Grey(RAL7037)

Fire resistance: UL94-V2



P/N	Thread Size	No. of Cables x cable ϕ mm	AG mm	GL mm	H mm	SW mm	Reference No. (Grey)	Reference No. (Black)	
HSK.MU.PG9(B/G)	PG9	4X1.4	15.2	8	22	19	9 00 003 1109 1	9 00 003 1109 2	50
HSK.MU.PG11.B(B/G)	PG11	2X4	18.6	8	25	22	9 00 003 1111 1	9 00 003 1111 2	50
HSK.MU.PG11.C(B/G)	PG11	3X3	18.6	8	25	22	9 00 003 1112 1	9 00 003 1112 2	50
HSK.MU.PG13.5.A(B/G)	PG13.5	2X5	20.4	9	26.5	24	9 00 003 1130 1	9 00 003 1130 2	50
HSK.MU.PG13.5.B(B/G)	PG13.5	6X3	20.4	9	26.5	24	9 00 003 1131 1	9 00 003 1131 2	50
HSK.MU.PG13.5.C(B/G)	PG13.5	3X4	20.4	9	26.5	24	9 00 003 1132 1	9 00 003 1132 2	50
HSK.MU.PG16.A(B/G)	PG16	2X6	22.5	10	28	27	9 00 003 1160 1	9 00 003 1160 2	50
HSK.MU.PG16.B(B/G)	PG16	7X3	22.5	10	28	27	9 00 003 1161 1	9 00 003 1161 2	50
HSK.MU.PG16.C(B/G)	PG16	4X4	22.5	10	28	27	9 00 003 1162 1	9 00 003 1162 2	50
HSK.MU.PG16.D(B/G)	PG16	6X4	22.5	10	28	27	9 00 003 1163 1	9 00 003 1163 2	50
HSK.MU.PG21.A(B/G)	PG21	4X6	28.3	11	31.5	33	9 00 003 1210 1	9 00 003 1210 2	20
HSK.MU.PG21.B(B/G)	PG21	3X7	28.3	11	31.5	33	9 00 003 1211 1	9 00 003 1211 2	20
HSK.MU.PG29.A(B/G)	PG29	10X6	37	11	39	42	9 00 003 1290 1	9 00 003 1290 2	20
HSK.MU.PG29.B(B/G)	PG29	4X9	37	11	39	42	9 00 003 1291 1	9 00 003 1291 2	20
HSK.MU.PG29.C(B/G)	PG29	6X6.5	37	11	39	42	9 00 003 1292 1	9 00 003 1292 2	20
HSK.MU.PG36.A(B/G)	PG36	2X15	47	13	48.5	53	9 00 003 1360 1	9 00 003 1360 2	10
HSK.MU.PG36.B(B/G)	PG36	3X10	47	13	48.5	53	9 00 003 1361 1	9 00 003 1361 2	10
HSK.MU.PG36.C(B/G)	PG36	9X7	47	13	48.5	53	9 00 003 1362 1	9 00 003 1362 2	10
HSK.MU.PG42.A(B/G)	PG42	4X12	54	13	47.3	60	9 00 003 1420 1	9 00 003 1420 2	10
HSK.MU.PG42.B(B/G)	PG42	3X15	54	13	47.3	60	9 00 003 1421 1	9 00 003 1421 2	10
HSK.MU.PG48.B(B/G)	PG48	6X12	59.3	14	47	68	9 00 003 1481 1	9 00 003 1481 2	5
HSK.MU.PG48.C(B/G)	PG48	3X18	59.3	14	47	68	9 00 003 1482 1	9 00 003 1482 2	5

Recommended accessories:




P23



P112


Plastic Cable Gland Plastic Accessories Metal Cable Gland Metal Accessories Ex Cable Gland Seal Plastic Hose Plastic Hose Connector Accessories Metal Hose Metal Hose Connector Distribution Boxes

HSK — Plastic Cable Gland– Metric thread Flat-entry Type

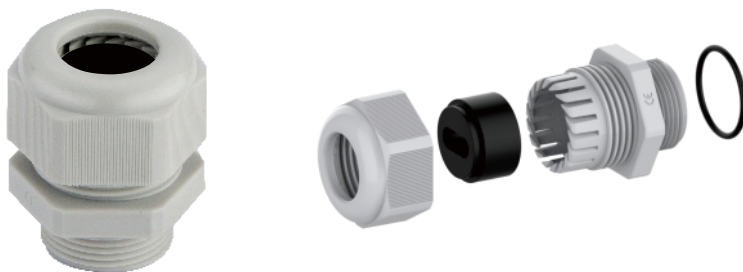

CE RoHS **IP65**

Material: PA
 Seal: NBR
 IP rating: IP65 (up to IP68 only when wire size = Mounting hole size)
 Working temperature: -40°C to 100°C in static state, or instantaneous up to 120°C; -20°C to 80°C in dynamic state, or instantaneous up to 100°C
 Color: Black(RAL9005), Grey(RAL7037)
 Fire resistance: UL94-V2

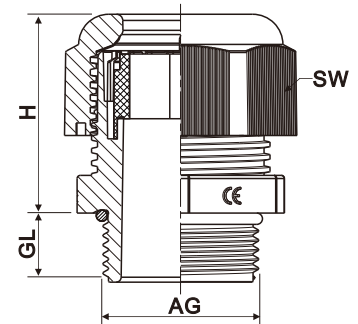

P/N	Thread Size	Length × Width mm	AG mm	GL mm	H mm	SW mm	Reference No. (Grey)	Reference No. (Black)	
HSK.FL.M20(B/G)	M20X1.5	12X7	20	9	26.5	24	9 00 004 0200 1	9 00 004 0200 2	50
HSK.FL.M25.A(B/G)	M25X1.5	14X6	25	11	31.5	33	9 00 004 0250 1	9 00 004 0250 2	20
HSK.FL.M25.B(B/G)	M25X1.5	14X7	25	11	31.5	33	9 00 004 0251 1	9 00 004 0251 2	20
HSK.FL.M32(B/G)	M32X1.5	22X8	32	11	39	42	9 00 004 0320 1	9 00 004 0320 2	20
HSK.FL.M40.A(B/G)	M40X1.5	28.5X10	40	13	48.5	53	9 00 004 0400 1	9 00 004 0400 2	10
HSK.FL.M40.B(B/G)	M40X1.5	30.5X12	40	13	48.5	53	9 00 004 0401 1	9 00 004 0401 2	10
HSK.FL.M40.C(B/G)	M40X1.5	31X7.5	40	13	48.5	53	9 00 004 0402 1	9 00 004 0402 2	10
HSK.FL.M50(B/G)	M50X1.5	3 3.5X11.5	50	13	47.3	60	9 00 004 0500 1	9 00 004 0500 2	10
HSK.FL.M63(B/G)	M63X1.5	38X12	63	14	47	68	9 00 004 0630 1	9 00 004 0630 2	10

Recommended accessories:



P22



P112

HSK — Plastic Cable Gland- PG thread Flat-entry Type



CE RoHs **IP65**

Material: PA


Seal: NBR

IP rating: IP65 (up to IP68 only when wire size = Mounting hole size)

Working temperature: -40℃ to 100℃ in static state, or instantaneous up to 120℃; -20℃ to 80℃ in dynamic state, or instantaneous up to 100℃

Color: Black(RAL9005), Grey(RAL7037)

Fire resistance: UL94-V2



P/N	Thread Size	Length × Width mm	AG mm	GL mm	H mm	SW mm	Reference No. (Grey)	Reference No. (Black)	
HSK.FL.PG13.5(B/G)	PG13.5	12X7	20.4	9	26.5	24	9 00 004 1130 1	9 00 004 1130 2	50
HSK.FL.PG21.A(B/G)	PG21	14X6	28.3	11	31.5	33	9 00 004 1210 1	9 00 004 1210 2	20
HSK.FL.PG21.B(B/G)	PG21	14X7	28.3	11	31.5	33	9 00 004 1211 1	9 00 004 1211 2	20
HSK.FL.PG29(B/G)	PG29	22X8	37	11	39	42	9 00 004 1290 1	9 00 004 1290 2	20
HSK.FL.PG36.A(B/G)	PG36	28.5X10	47	13	48.5	53	9 00 004 1360 1	9 00 004 1360 2	10
HSK.FL.PG36.B(B/G)	PG36	30.5X12	47	13	48.5	53	9 00 004 1361 1	9 00 004 1361 2	10
HSK.FL.PG36.C(B/G)	PG36	31X7.5	47	13	48.5	53	9 00 004 1362 1	9 00 004 1362 2	10
HSK.FL.PG42(B/G)	PG42	33.5X11.5	54	13	47.3	60	9 00 004 1420 1	9 00 004 1420 2	10
HSK.FL.PG48(B/G)	PG48	38X12	59.3	14	47	68	9 00 004 1480 1	9 00 004 1480 2	10

Recommended accessories:



P23



P112


Plastic Cable Gland
Accessories
Metal Cable Gland
Metal Accessories
Ex Cable Gland
Seal
Plastic Hose
Plastic Hose Connector
Metal Hose
Metal Hose Connector
Distribution Boxes

HSK — Plastic Cable Gland with Bending protection – Metric thread



CE RoHs **IP68**

Material: PA
Seal: NBR
IP rating: IP68 with specified mating threads and O-ring
Working temperature: -40°C to 100°C in static state, or instantaneous up to 120°C; -20°C to 80°C in dynamic state, or instantaneous up to 100°C
Color: Black(RAL9005), Grey(RAL7037)
Fire resistance: UL94-V2

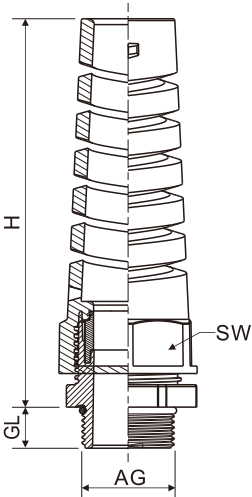

P/N	Thread Size	Øk Cable OD mm	AG mm	GL mm	H mm	SW mm	Reference No. (Grey)	Reference No. (Black)	
HSK.F.M12(B/G)	M12x1.5	3-6.5	12	8	54	15	9 00 005 0120 1	9 00 005 0120 2	100
HSK.F.M16(B/G)	M16x1.5	4-8	16	8	63	19	9 00 005 0160 1	9 00 005 0160 2	100
HSK.F.M18(B/G)	M18x1.5	5-10	18	8	78	22	9 00 005 0180 1	9 00 005 0180 2	50
HSK.F.M20.A(B/G)	M20x1.5	6-12	20	9	90	24	9 00 005 0200 1	9 00 005 0200 2	50
HSK.F.M22.B(B/G)	M20x1.5	10-14	22	10	100	27	9 00 005 0201 1	9 00 005 0201 2	25
HSK.F.M25(B/G)	M25x1.5	13-18	25	11	114	33	9 00 005 0250 1	9 00 005 0250 2	25

Recommended accessories:



P22



P112

HSK — Plastic Cable Gland with Bending protection – PG thread



CE RoHS **IP68**

Material: PA


Seal: NBR

IP rating: IP68 with specified mating threads and O-ring

Working temperature: -40°C to 100°C in static state, or instantaneous up to 120°C; -20°C to 80°C in dynamic state, or instantaneous up to 100°C

Color: Black(RAL9005), Grey(RAL7037)

Fire resistance: UL94-V2

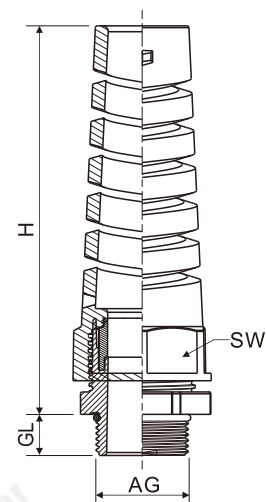

P/N	Thread Size	Øk Cable OD mm	AG mm	GL mm	H mm	SW mm	Reference No. (Grey)	Reference No. (Black)	
HSK.F.PG7(B/G)	PG7	3-6.5	12.5	8	54	15	9 00 005 1070 1	9 00 005 1070 2	100
HSK.F.PG9(B/G)	PG9	4-8	15.2	8	63	19	9 00 005 1090 1	9 00 005 1090 2	100
HSK.F.PG11(B/G)	PG11	5-10	18.6	8	78	22	9 00 005 1110 1	9 00 005 1110 2	50
HSK.F.PG13.5(B/G)	PG13.5	6-12	20.4	9	90	24	9 00 005 1130 1	9 00 005 1130 2	50
HSK.F.PG16(B/G)	PG16	10-14	22.5	10	100	27	9 00 005 1160 1	9 00 005 1160 2	25
HSK.F.PG21(B/G)	PG21	13-18	28.3	11	114	33	9 00 005 1210 1	9 00 005 1210 2	25

Recommended accessories:



P23



P112