


WQG — Plastic Hose Connector–Quick connection–Metric thread

CE RoHS **IP67**



Material: PA
Seal: NBR
IP rating: IP67 with O-ring
Working temperature: -40°C to 100°C, or instantaneous up to 120°C;
Color: Black(RAL9005), Grey(RAL7037)
Fire resistance: UL94-V2

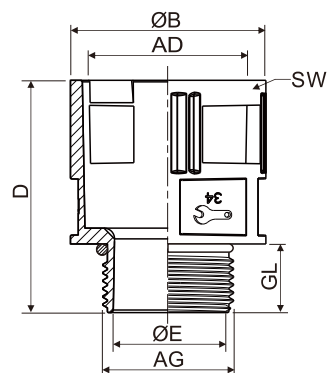

P/N	Thread Size	Hose Size	AG mm	GL mm	ØE mm	ØB mm	D mm	SW mm	Reference No. (Grey)	Reference No. (Black)	
WQG.M12(B/G)	M12X1.5	AD10.0	12	11	7	17	35	15	9 00 070 0120 1	9 00 070 0120 2	50
WQG.M16(B/G)	M16X1.5	AD13.0	16	11	10	20	37	18	9 00 070 0160 1	9 00 070 0160 2	50
WQG.M18(B/G)	M18X1.5	AD15.8	18	12	13.5	23	39.5	21	9 00 070 0180 1	9 00 070 0180 2	50
WQG.M20.A(B/G)	M20X1.5	AD18.5	20	12	14.7	26	40	24	9 00 070 0200 1	9 00 070 0200 2	50
WQG.M20.B(B/G)	M20X1.5	AD21.2	20	13	15.5	29.5	45	27	9 00 070 0201 1	9 00 070 0201 2	50
WQG.M25.A(B/G)	M25X1.5	AD21.2	25	13	17	29.5	45	27	9 00 070 0250 1	9 00 070 0250 2	20
WQG.M25.B(B/G)	M25X1.5	AD28.5	25	13	20.5	37	47	34	9 00 070 0251 1	9 00 070 0251 2	20
WQG.M32(B/G)	M32X1.5	AD28.5	32	13	23.5	37	47	34	9 00 070 0320 1	9 00 070 0320 2	20
WQG.M40.A(B/G)	M40X1.5	AD34.5	40	15	29	44	51	42	9 00 070 0400 1	9 00 070 0400 2	20
WQG.M40.B(B/G)	M40X1.5	AD42.5	40	15	33	52	54	58	9 00 070 0401 1	9 00 070 0401 2	10
WQG.M50(B/G)	M50X1.5	AD54.5	50	16	43	64	55	63	9 00 070 0500 1	9 00 070 0500 2	5
WQG.M63(B/G)	M63X1.5	AD54.5	63	16	52	64	55	63	9 00 070 0630 1	9 00 070 0630 2	5

Recommended accessories:



P22



P112



P118

WQG — Plastic Hose Connector—Quick connection—PG thread

CE RoHs **IP67**

Material: PA


Seal: NBR

IP rating: IP67 with O-ring

Working temperature: -40°C to 100°C, or instantaneous up to 120°C;

Color: Black(RAL9005), Grey(RAL7037)

Fire resistance: UL94-V2

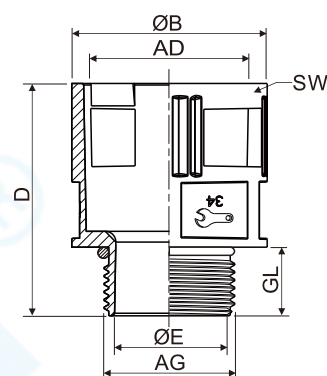

P/N	Thread Size	Hose Size	AG mm	GL mm	ØE mm	ØB mm	D mm	SW mm	Reference No. (Grey)	Reference No. (Black)	
WQG.PG7(B/G)	PG7	AD10.0	12.5	11	7	17	35	15	9 00 070 1070 1	9 00 070 1070 2	50
WQG.PG9(B/G)	PG9	AD13.0	15.2	11	10	20	37	18	9 00 070 1090 1	9 00 070 1090 2	50
WQG.PG11(B/G)	PG11	AD15.8	18.6	12	13.5	23	39.5	21	9 00 070 1110 1	9 00 070 1110 2	50
WQG.PG13.5(B/G)	PG13.5	AD18.5	20.4	12	14.7	26	40	24	9 00 070 1130 1	9 00 070 1130 2	50
WQG.PG16(B/G)	PG16	AD21.2	22.5	13	17	29.5	45	27	9 00 070 1160 1	9 00 070 1160 2	50
WQG.PG21(B/G)	PG21	AD28.5	28.3	13	23.5	37	47	34	9 00 070 1210 1	9 00 070 1210 2	20
WQG.PG29(B/G)	PG29	AD34.5	37	15	29	44	51	42	9 00 070 1290 1	9 00 070 1290 2	20
WQG.PG36(B/G)	PG36	AD42.5	47	15	36.5	52	54	58	9 00 070 1360 1	9 00 070 1360 2	10
WQG.PG48(B/G)	PG48	AD54.5	59.3	16	52	64	55	63	9 00 070 1480 1	9 00 070 1480 2	5

Recommended accessories:



P23



P112




P118

WQG — Plastic Hose Connector–Quick connection–G Type thread

CE RoHS **IP67**



Material: PA
Seal: NBR
IP rating: IP67 with O-ring
Working temperature: -40°C to 100°C, or instantaneous up to 120°C;
Color: Black(RAL9005), Grey(RAL7037)
Fire resistance: UL94-V2

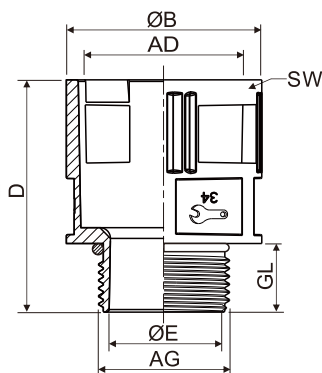

P/N	Thread Size	Hose Size	AG mm	GL mm	ØE mm	ØB mm	D mm	SW mm	Reference No. (Grey)	Reference No. (Black)	
WQG.G1/4(B/G)	G1/4"	AD10.0	13.2	11	7	17	35	15	9 00 070 2020 1	9 00 070 2020 2	50
WQG.G3/8.A(B/G)	G3/8"	AD13.0	16.7	11	10	20	37	18	9 00 070 2030 1	9 00 070 2030 2	50
WQG.G1/2.A(B/G)	G1/2"	AD15.8	21	12	13.5	23	39.5	21	9 00 070 2040 1	9 00 070 2040 2	50
WQG.G1/2.B(B/G)	G1/2"	AD18.5	21	12	14.7	26	40	24	9 00 070 2041 1	9 00 070 2041 2	50
WQG.G1/2.C(B/G)	G1/2"	AD21.2	21	13	15.5	29.5	45	27	9 00 070 2042 1	9 00 070 2042 2	50
WQG.G3/4(B/G)	G3/4"	AD28.5	26.4	13	20.5	37	47	34	9 00 070 2060 1	9 00 070 2060 2	20
WQG.G1(B/G)	G1"	AD34.5	33.2	15	25.5	44	51	42	9 00 070 2080 1	9 00 070 2080 2	20
WQG.G1.1/4(B/G)	G1-1/4"	AD42.5	42	15	35	52	54	50	9 00 070 2100 1	9 00 070 2100 2	10
WQG.G1.1/2(B/G)	G1-1/2"	AD54.5	47.8	16	39	64	55	63	9 00 070 2120 1	9 00 070 2120 2	5
WQG.G2(B/G)	G2"	AD54.5	59.6	16	48	64	55	63	9 00 070 2140 1	9 00 070 2140 2	5

Recommended accessories:



P24



P112



P118

WQG — Plastic 90° Angle Hose Connector—Quick connection—Metric thread

CE RoHS **IP66**

Material: PA


Seal: NBR

IP rating: IP66 with O-ring

Working temperature: -40°C to 100°C, or instantaneous up to 120°C;

Color: Black(RAL9005), Grey(RAL7037)

Fire resistance: UL94-V2

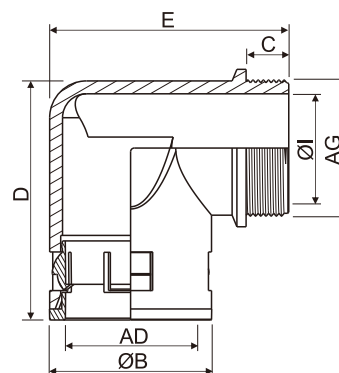

P/N	Thread Size	Hose Size	ØI mm	ØB mm	C mm	D mm	E mm	AG mm	Reference No. (Grey)	Reference No. (Black)	
WQG90.M10/AD10.0(B/G)	M10x1.0	AD10.0	7	17	10	33.5	32	10	9 00 071 0100 1	9 00 071 0100 2	100
WQG90.M12/AD13.0(B/G)	M12x1.5	AD13.0	8	20..2	10	36	34	12	9 00 071 0120 1	9 00 071 0120 2	100
WQG90.M16/AD15.8.A(B/G)	M16x1.5	AD15.8	12	23.2	10	42	47	16	9 00 071 0160 1	9 00 071 0160 2	50
WQG90.M16/AD18.5.B(B/G)	M18x1.5	AD18.5	14	26.2	11	45	44	18	9 00 071 0181 1	9 00 071 0181 2	50
WQG90.M20/AD21.2(B/G)	M20x1.5	AD21.2	15.5	29.7	13	50	49	20	9 00 071 0200 1	9 00 071 0200 2	25
WQG90.M25/AD25.0.A(B/G)	M25x1.5	AD25.0	18	33	13	57	56.2	25	9 00 071 0250 1	9 00 071 0250 2	25
WQG90.M25/AD28.5.B(B/G)	M25x1.5	AD28.5	18	37.5	13	57	56.2	25	9 00 071 0251 1	9 00 071 0251 2	20
WQG90.M32/AD34.5(B/G)	M32x1.5	AD34.5	24	44	12	67.5	63	32	9 00 071 0320 1	9 00 071 0320 2	10
WQG90.M40/AD42.5(B/G)	M40x1.5	AD42.5	32	52	12	83	70	40	9 00 071 0400 1	9 00 071 0400 2	5
WQG90.M50/AD54.5(B/G)	M50x1.5	AD54.5	39	64	14	88	83	50	9 00 071 0500 1	9 00 071 0500 2	5
WQG90.M63/AD54.5(B/G)	M63x1.5	AD54.5	53	64	14	88	83	63	9 00 071 0630 1	9 00 071 0630 2	5

Recommended accessories:



P22



P112




P118

WQG — Plastic 90° Angle Hose Connector–Quick connection–PG thread

CE RoHs **IP66**




Material: PA
 Seal: NBR
 IP rating: IP66 with O-ring
 Working temperature: -40°C to 100°C, or instantaneous up to 120°C;
 Color: Black(RAL9005), Grey(RAL7037)
 Fire resistance: UL94-V2, RoHS compliant

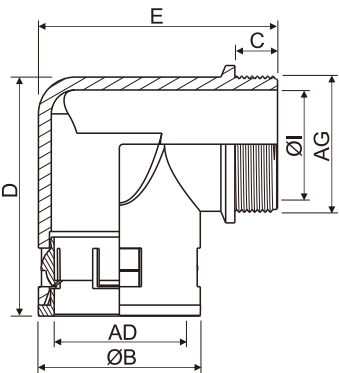


P/N	Thread Size	Hose Size	ØI mm	ØB mm	C mm	D mm	E mm	AG mm	Reference No. (Grey)	Reference No. (Black)	
WQG90.PG7/AD10.0(B/G)	PG7	AD10.0	8.5	17	10	33.5	32	12.5	9 00 071 1070 1	9 00 071 1070 2	100
WQG90.PG9/AD13.0(B/G)	PG9	AD13.0	12	20.2	10	36	34	15.2	9 00 071 1090 1	9 00 071 1090 2	100
WQG90.PG11/AD15.8(B/G)	PG11	AD15.8	15.5	23.2	10	42	37	18.6	9 00 071 1110 1	9 00 071 1110 2	50
WQG90.PG13.5/AD18.5(B/G)	PG13.5	AD18.5	13.5	26.2	11	46	44	20.4	9 00 071 1130 1	9 00 071 1130 2	50
WQG90.PG16/AD21.2(B/G)	PG16	AD21.2	18	29.7	12	50	49	22.5	9 00 071 1160 1	9 00 071 1160 2	25
WQG90.PG21/AD28.5(B/G))	PG21	AD28.5	24	37.5	12	57	56.2	28.3	9 00 071 1210 1	9 00 071 1210 2	20
WQG90.PG29/AD34.5(B/G)	PG29	AD34.5	32	44	12	67.5	63	37	9 00 071 1290 1	9 00 071 1290 2	10
WQG90.PG36/AD42.5(B/G)	PG36	AD42.5	36.5	52	12	83	70	47	9 00 071 1360 1	9 00 071 1360 2	5
WQG90.PG48/AD54.5(B/G)	PG48	AD54.5	48.5	64	14	88	83	59.3	9 00 071 1480 1	9 00 071 1480 2	5

Recommended accessories:

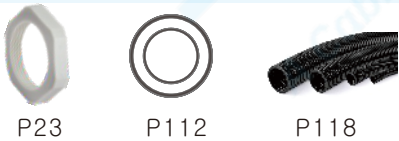

WQG — Plastic 45° Angle Hose Connector—Quick connection—Metric thread

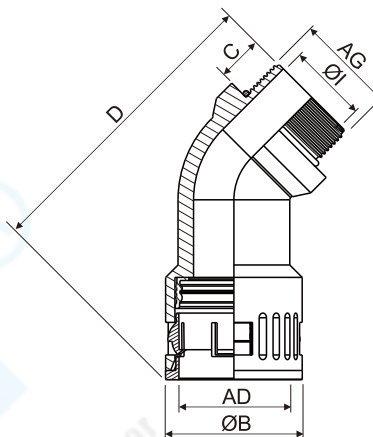CE RoHs **IP66**

Material: PA

Seal: NBR

IP rating: IP66 with O-ring

Working temperature: -40°C to 100°C, or instantaneous up to 120°C;

Color: Black(RAL9005), Grey(RAL7037)

Fire resistance: UL94-V2, RoHS compliant

P/N	Thread Size	Hose Size	AG mm	C mm	ØI mm	ØB mm	D mm	Reference No. (Grey)	Reference No. (Black)	
WQG45.M16/AD15.8(B/G)	M16x1.5	AD15.8	16	12	12	23.2	57	9 00 072 0160 1	9 00 072 0160 2	50
WQG45.M20/AD15.8.A(B/G)	M20x1.5	AD15.8	20	12	12	23.2	57	9 00 072 0200 1	9 00 072 0200 2	50
WQG45.M20/AD21.2.B(B/G)	M20x1.5	AD21.2	20	13	15	29.7	72	9 00 072 0201 1	9 00 072 0201 2	25
WQG45.M32/AD34.5(B/G)	M32x1.5	AD34.5	32	14	23	44	99	9 00 072 0320 1	9 00 072 0320 2	10
WQG45.M40/AD34.5(B/G)	M40x1.5	AD34.5	40	14	30	44	99	9 00 072 0400 1	9 00 072 0400 2	10

Recommended accessories:



P22



P112




P118

WQG — Plastic 45° Angle Hose Connector–Quick connection–PG thread

CE RoHs **IP66**




Material: PA
Seal: NBR
IP rating: IP66 with O-ring
Working temperature: -40℃ to 100℃, or instantaneous up to 120℃;
Color: Black(RAL9005), Grey(RAL7037)
Fire resistance: UL94-V2, RoHS compliant

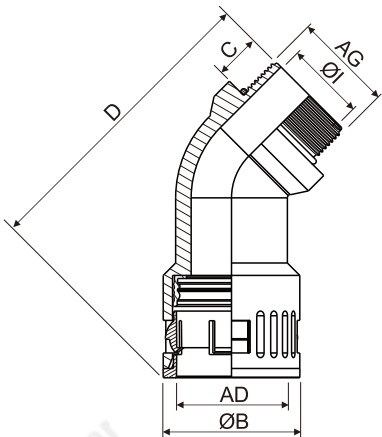


P/N	Thread Size	Hose Size	AG mm	C mm	ØI mm	ØB mm	D mm	Reference No. (Grey)	Reference No. (Black)	
WQG45.PG11/AD15.8(B/G)	PG11	AD15.8	18.6	12	12	23.2	57	9 00 072 1110 1	9 00 072 1110 2	50
WQG45.PG13/AD21.2(B/G)	PG13.5	AD21.2	20.4	13	14	29.7	73	9 00 072 1130 1	9 00 072 1130 2	25
WQG45.PG16/AD21.2(B/G)	PG16	AD21.2	22.5	13	17	29.7	73	9 00 072 1160 1	9 00 072 1160 2	25
WQG45.PG29/AD34.5(B/G)	PG29	AD34.5	37	14	30	44	99	9 00 072 1290 1	9 00 072 1290 2	10

Recommended accessories:

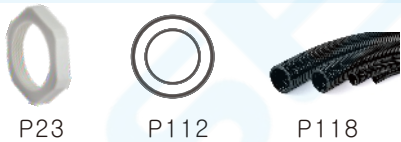

WQG — Plastic Y-Shape Hose Connector-Quick connection

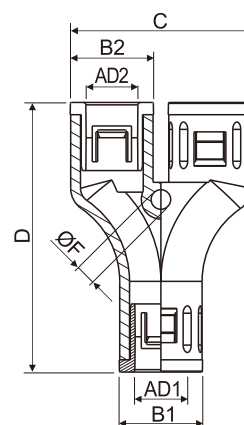CE RoHs **IP54**

Material: PA
 IP rating: IP54
 Working temperature: -40℃ to 100℃, or instantaneous up to 120℃;
 Color: Black(RAL9005), Grey(RAL7037)
 Fire resistance: UL94-V2

P/N	AD1	AD2	B1	B2	D mm	C mm	Mounting hole mm	Reference No. (Grey)	Reference No. (Black)	
WQY.AD10.0(B/G)	10	2x10.0	17	17	50	37	1x4.0	9 00 074 6100 1	9 00 074 6100 2	20
WQY.AD13.0.A(B/G)	13	2x10.0	17	17	50	37	1x4.0	9 00 074 6130 1	9 00 074 6130 2	20
WQY.AD13.0.B(B/G)	13	2x13.0	17	17	50	37	1x4.0	9 00 074 6131 1	9 00 074 6131 2	20
WQY.AD15.8.A(B/G)	15.8	2x13.0	17	17	50	37	1x4.0	9 00 074 6160 1	9 00 074 6160 2	20
WQY.AD15.8.B(B/G)	15.8	2x15.8	23	23	50	37	1x4.0	9 00 074 6161 1	9 00 074 6161 2	20
WQY.AD18.5(B/G)	18.5	2x18.5	26.2	26.2	75	56	1x4.0	9 00 074 6190 1	9 00 074 6190 2	20
WQY.AD21.2.A(B/G)	21.2	2x21.2	29.7	29.7	76.5	63	1x4.0	9 00 074 6220 1	9 00 074 6220 2	10
WQY.AD21.2.B(B/G)	21.2	2x15.8	29.7	23	76.5	63	1x4.0	9 00 074 6221 1	9 00 074 6221 2	10
WQY.AD28.5.A(B/G)	28.5	2x15.8	37.4	23	76.5	63	1x4.0	9 00 074 6290 1	9 00 074 6290 2	10
WQY.AD28.5.B(B/G)	28.5	2x21.2	37.4	29.7	76.5	63	1x4.0	9 00 074 6291 1	9 00 074 6291 2	10

Recommended accessories:




P118

GFT — Plastic Flange Type Large Diameter Hose Connector –Quick connection

CE RoHs **IP54**



Material: PA
IP rating: IP54
Working temperature: -40℃ to 100℃, or instantaneous up to 120℃;
Color: Black(RAL9005), Grey(RAL7037)
Fire resistance: UL94-V2

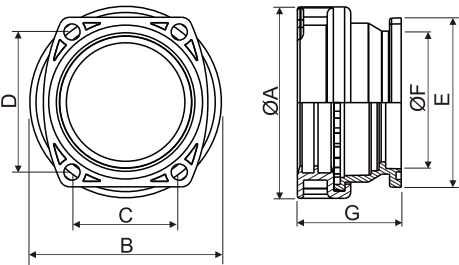


P/N	Hose Size	ØA mm	B mm	C mm	D mm	E mm	ØF mm	G mm	Screw Size	Reference No. (Grey)	Reference No. (Black)
GFT.AD67(B/G)	AD67.2	94	80	53	69	83	52	52	M6	9 00 075 6670 1	9 00 075 6670 2
GFT.AD80(B/G)	AD80.0	110	94	60	80	96	68	60	M6	9 00 075 6800 1	9 00 075 6800 2

SFK — Plastic Hose Connector—Metric thread

CE RoHS **IP54**

Material: PA
 IP rating: IP54
 Working temperature: -40°C to 100°C, or instantaneous up to 120°C;
 Color: Black(RAL9005), Grey(RAL7037)
 Fire resistance: UL94-V2

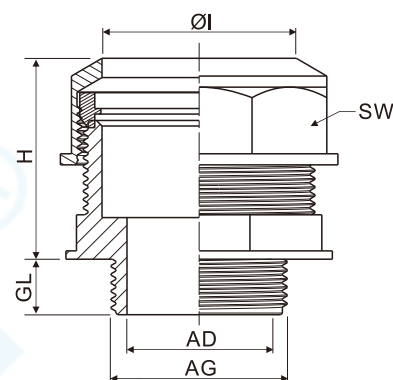

P/N	Thread Size	Hose Size	AG	ØI mm	GL mm	H mm	Reference No. (Grey)	Reference No. (Black)	
SFK.M10/AD10.0(B/G)	M10x1.0	AD10.0	10	11	8	16	9 00 777 0100 1	9 00 777 0100 2	100
SFK.M12/AD10.0(B/G)	M12x1.5	AD10.0	12	11	8	16	9 00 777 0120 1	9 00 777 0120 2	100
SFK.M16/AD13.0(B/G)	M16x1.5	AD13.0	16	14	8	16	9 00 777 0160 1	9 00 777 0160 2	100
SFK.M16/AD15.8(B/G)	M16x1.5	AD15.8	16	17	8	16	9 00 777 0161 1	9 00 777 0161 2	100
SFK.M18/AD15.8(B/G)	M18x1.5	AD15.8	18	17	8	16	9 00 777 0180 1	9 00 777 0180 2	100
SFK.M18/AD18.5(B/G)	M18x1.5	AD18.5	18	19	8	16.5	9 00 777 0181 1	9 00 777 0181 2	100
SFK.M20/AD18.5(B/G)	M20x1.5	AD18.5	20	19	8	16.5	9 00 777 0200 1	9 00 777 0200 2	100
SFK.M20/AD21.2(B/G)	M20x1.5	AD21.2	20	22	8	26	9 00 777 0201 1	9 00 777 0201 2	50
SFK.M24/AD21.2(B/G)	M24x1.5	AD21.2	24	22	8	26	9 00 777 0240 1	9 00 777 0240 2	50
SFK.M25/AD28.5(B/G)	M25x1.5	AD28.5	25	29	10	32	9 00 777 0250 1	9 00 777 0250 2	25
SFK.M27/AD28.5(B/G)	M27x2.0	AD28.5	27	29	10	32	9 00 777 0270 1	9 00 777 0270 2	25
SFK.M30/AD28.5(B/G)	M30x2.0	AD28.5	30	29	10	32	9 00 777 0300 1	9 00 777 0300 2	25
SFK.M32/AD34.5(B/G)	M32x1.5	AD34.5	32	35	10	38.5	9 00 777 0320 1	9 00 777 0320 2	20
SFK.M36/AD34.5(B/G)	M36x2.0	AD34.5	36	35	10	38.5	9 00 777 0360 1	9 00 777 0360 2	20
SFK.M40/AD42.5(B/G)	M40x1.5	AD42.5	40	43.5	14	44.5	9 00 777 0400 1	9 00 777 0400 2	10
SFK.M48/AD42.5(B/G)	M48x2.0	AD42.5	48	43.5	14	44.5	9 00 777 0480 1	9 00 777 0480 2	10
SFK.M50/AD54.5(B/G)	M50x1.5	AD54.5	50	55	16	48	9 00 777 0500 1	9 00 777 0500 2	5
SFK.M63/AD54.5(B/G)	M63x1.5	AD54.5	63	55	16	48	9 00 777 0630 1	9 00 777 0630 2	5

Recommended accessories:



P22



P112




P118

SFK — Plastic Hose Connector-PG thread

CE RoHS **IP54**



Material: PA
IP rating: IP54
Working temperature: -40°C to 100°C, or instantaneous up to 120°C;
Color: Black(RAL9005), Grey(RAL7037)
Fire resistance: UL94-V2

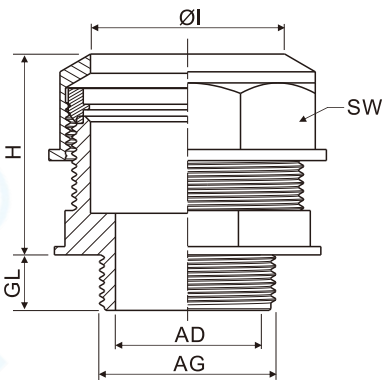

P/N	Thread Size	Hose Size	AG	ØI mm	GL mm	H mm	Reference No. (Grey)	Reference No. (Black)	
SFK.PG7/AD10.0(B/G)	PG7	AD10.0	12.5	11	8	16	9 00 077 1070 1	9 00 077 1070 2	100
SFK.PG9/AD13.0(B/G)	PG9	AD13.0	15.2	14	8	16	9 00 077 1090 1	9 00 077 1090 2	100
SFK.PG11/AD15.8(B/G)	PG11	AD15.8	18.6	17	8	16	9 00 077 1110 1	9 00 077 1110 2	100
SFK.PG13.5/AD18.5(B/G)	PG13.5	AD18.5	20.4	19	8	16.5	9 00 077 1130 1	9 00 077 1130 2	100
SFK.PG16/AD21.2(B/G)	PG16	AD21.2	22.5	22	8	26	9 00 077 1160 1	9 00 077 1160 2	50
SFK.PG21/AD28.5(B/G)	PG21	AD28.5	28.3	29	10	32	9 00 077 1210 1	9 00 077 1210 2	25
SFK.PG29/AD34.5(B/G)	PG29	AD34.5	37	35	10	38.5	9 00 077 1290 1	9 00 077 1290 2	20
SFK.PG36/AD42.5(B/G)	PG36	AD42.5	48	43.5	14	44.5	9 00 077 1360 1	9 00 077 1360 2	10
SFK.PG48/AD54.5(B/G)	PG48	AD54.5	59.3	55	16	48	9 00 077 1480 1	9 00 077 1480 2	5

Recommended accessories:



P23




P112



P118

WQG — Plastic Female Threaded Hose Connector—Metric thread—Quick connection

CE RoHs **IP66**

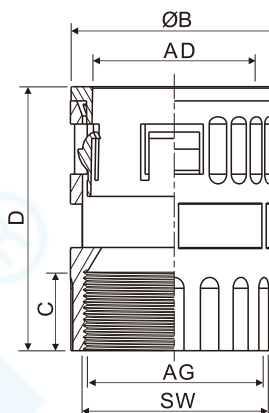

Material: PA
 Seal: NBR
 IP rating: IP66 with O-ring
 Working temperature: -40°C to 100°C, or instantaneous up to 120°C;
 Color: Black(RAL9005), Grey(RAL7037)
 Fire resistance: UL94-V2, RoHS compliant


P/N	Thread Size	Hose Size	AG	C mm	SW mm	ØB mm	D mm	Reference No. (Grey)	Reference No. (Black)	
WQG.IT.M12/AD10(B/G)	M12x1.5	AD10.0	12	11.6	15	35	35	9 00 078 0120 1	9 00 078 0120 2	100
WQG.IT.M16/AD13(B/G)	M16x1.5	AD13.0	16	13	18	38	38	9 00 078 0160 1	9 00 078 0160 2	100
WQG.IT.M18/AD15.8(B/G)	M18x1.5	AD15.8	18	14	21	41.2	41.2	9 00 078 0180 1	9 00 078 0180 2	50
WQG.IT.M20/AD18.5(B/G)	M20x1.5	AD18.5	20	14.5	24	42	42	9 00 078 0200 1	9 00 078 0200 2	50
WQG.IT.M20/AD21.2(B/G)	M20x1.5	AD21.2	20	16	27	48	48	9 00 078 0201 1	9 00 078 0201 2	50
WQG.IT.M25/AD28.5(B/G)	M25x1.5	AD28.5	25	20	34	54	54	9 00 078 0250 1	9 00 078 0250 2	25
WQG.IT.M32/AD34.5(B/G)	M32x1.5	AD34.5	32	20	40	56	56	9 00 078 0320 1	9 00 078 0320 2	20
WQG.IT.M40/AD42.5(B/G)	M40x1.5	AD42.5	42.5	20	48	59	59	9 00 078 0400 1	9 00 078 0400 2	10
WQG.IT.M50/AD54.5(B/G)	M50x1.5	AD54.5	50	20	59	59	59	9 00 078 0500 1	9 00 078 0500 2	5
WQG.IT.M63/AD54.5(B/G)	M63x1.5	AD54.5	63	20	59	59	59	9 00 078 0630 1	9 00 078 0630 2	5

Recommended accessories:



P118

WQG — Plastic Female Threaded Hose Connector–PG thread–Quick connection

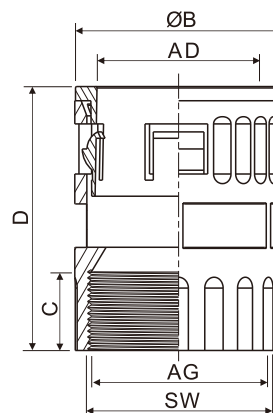CE RoHs **IP66**


Material: PA
Seal: NBR
IP rating: IP66 with O-ring
Working temperature: -40°C to 100°C, or instantaneous up to 120°C;
Color: Black(RAL9005), Grey(RAL7037)
Fire resistance: UL94-V2

P/N	Thread Size	Hose Size	AG	C mm	SW mm	ØB mm	D mm	Reference No. (Grey)	Reference No. (Black)	
WQG.IT.PG7/AD10(B/G)	PG7	AD10.0	12	11.6	15	17	35	9 00 078 1070 1	9 00 078 1070 2	100
WQG.IT.PG9/AD13(B/G)	PG9	AD13.0	16	13	18	20.2	38	9 00 078 1090 1	9 00 078 1090 2	100
WQG.IT.PG11/AD15.8(B/G)	PG11	AD15.8	18	14	21	23.2	41.2	9 00 078 1110 1	9 00 078 1110 2	50
WQG.IT.PG13.5/AD18.5(B/G)	PG13.5	AD18.5	20	14.5	24	26.2	42	9 00 078 1130 1	9 00 078 1130 2	50
WQG.IT.PG16/AD21.2(B/G)	PG16	AD21.2	20	16	27	29.7	48	9 00 078 1160 1	9 00 078 1160 2	50
WQG.IT.PG21/AD28.5(B/G)	PG21	AD28.5	25	20	34	37.4	54	9 00 078 1210 1	9 00 078 1210 2	25
WQG.IT.PG29/AD34.5(B/G)	PG29	AD34.5	32	20	40	44	56	9 00 078 1290 1	9 00 078 1290 2	20
WQG.IT.PG36/AD42.5(B/G)	PG36	AD42.5	42.5	20	48	51.8	59	9 00 078 1360 1	9 00 078 1360 2	10
WQG.IT.PG42/AD54.5(B/G)	PG42	AD54.5	50	20	59	64	59	9 00 078 1420 1	9 00 078 1420 2	5
WQG.IT.PG48/AD54.5(B/G)	PG48	AD54.5	63	20	59	64	59	9 00 078 1480 1	9 00 078 1480 2	5

Recommended accessories:



P118