


IP67

06

- SY Series IP67
- Bayonet coupling

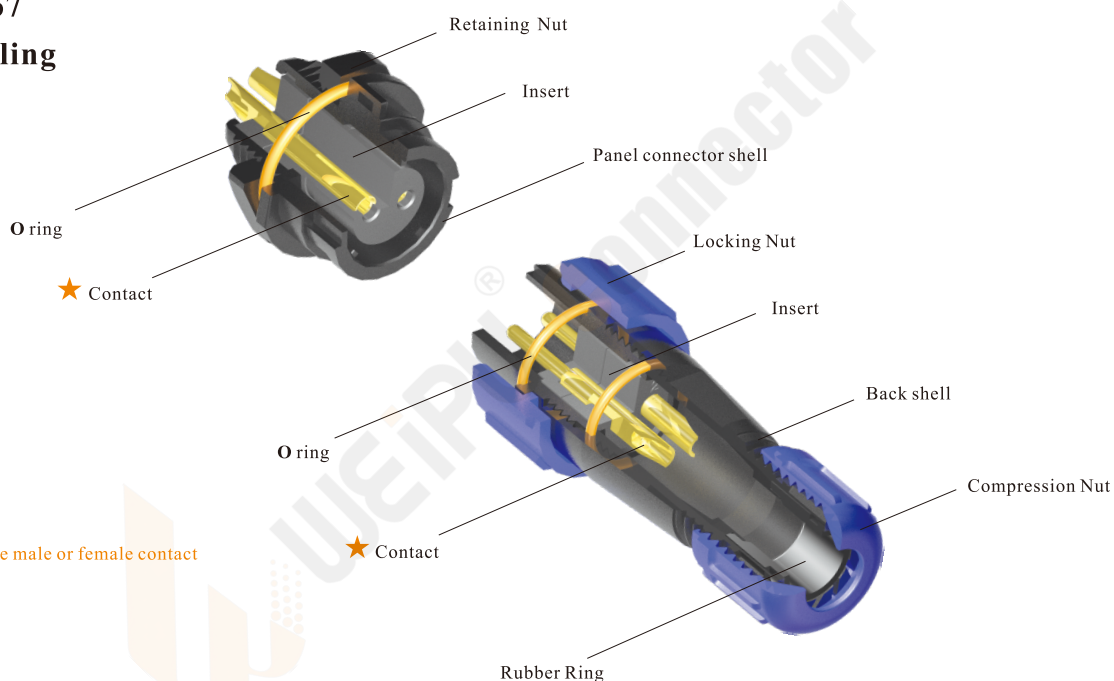

Material and spec

Coupling	Bayonet	
Shell material	PC, Nylon66, fire resistance: V-0	
Insert material	PPS, max temperature 260 °C	
Contact material	Brass with gold plating	
Termination	Solder: SY11, SY13, SY17, SY21, SY25, SY29 Crimp: SY17, SY21, SY25, SY29 Screw: SY21, SY25, SY29(Ø2.5, Ø3, Ø3.5mm contact)	
Cable outer diameter range	SY11: I:3-4mm, II:4-6.5mm SY17: 6-10mm SY25: I:10-14mm, II: 7-12mm	SY13: I: 4-6.5mm, II: 5-8mm SY21: I: 4.5-7mm, II:7-12mm III:5-9mm SY29: I:9-13mm, II:13-16mm
IP rating	IP67	
Mating cycle	500	
Temperature range	-40℃~+85℃; SY25 Data:-20℃~+70℃	
Insulation resistance	2000 MΩ	



SY25 Series


SY25



Plug with LC adapter
Mate with SY2511, SY2511C,
SY2512, SY2513, SY2515

SY2510/PLC

Wire length:
0.5m
1.0m
1.5m
2.0m
3.0m

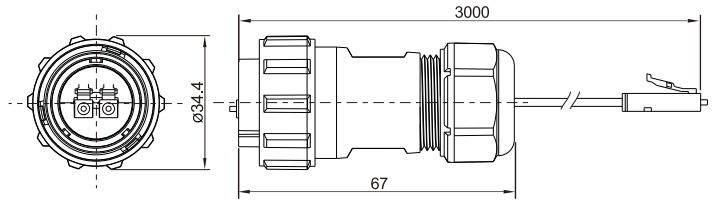


★ Wire length can be customized



Receptacle with LC adapter C
Mate with SY2510

SY2511C/SLC

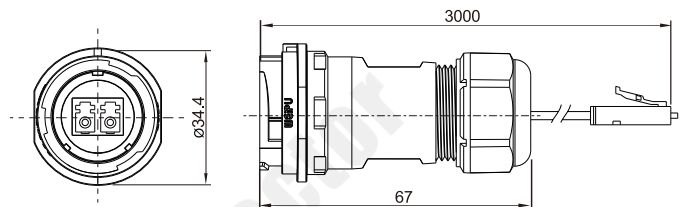


★ Wire length can be customized




Rear-nut mount receptacle
with LC adapter
Mate with SY2510

SY2512/SLC

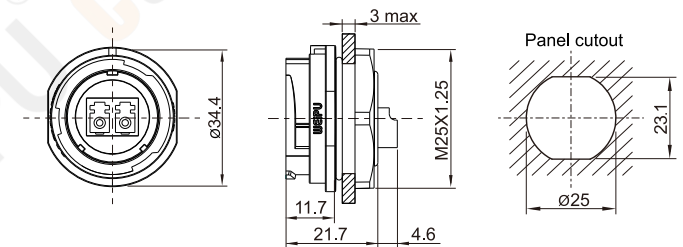


2-hole flange
with LC adapter
Mate with SY2510

SY2513/SLC

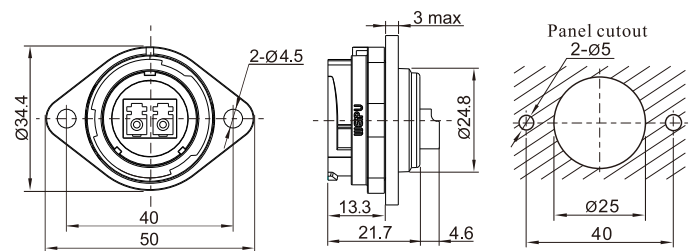

Front-nut mount
with LC adapter
Mate with SY2510

SY2515/SLC

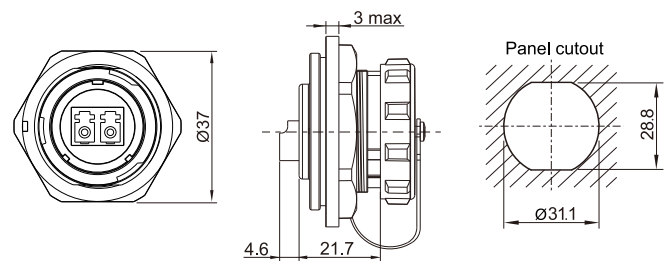

SY25 Series




SY25



Plug with USB3.0 adapter
Mate with SY2511, SY2511C,
SY2512, SY2513, SY2515

SY2510/PUSB3.0

Wire length:
0.5m
1.0m
1.5m
2.0m
3.0m

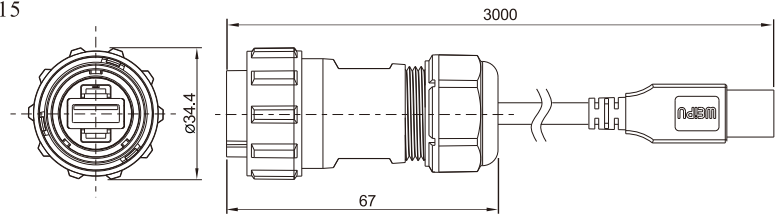


★ Wire length can be customized

06



Receptacle with USB3.0 adapter C
Mate with SY2510

SY2511C/SUSB3.0

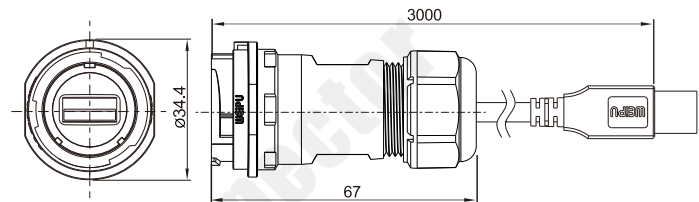


★ Wire length can be customized




Rear-nut mount receptacle
with USB3.0 adapter
Mate with SY2510

SY2512/SUSB3.0

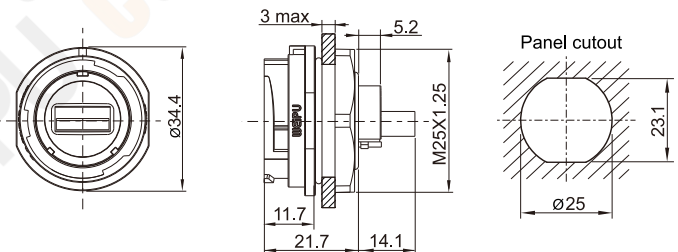


2-hole flange
with USB3.0 adapter
Mate with SY2510

SY2513/SUSB3.0

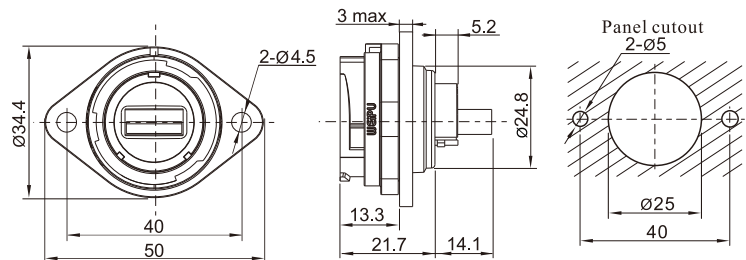

Front-nut mount
with USB3.0 adapter
Mate with SY2510

SY2515/SUSB3.0

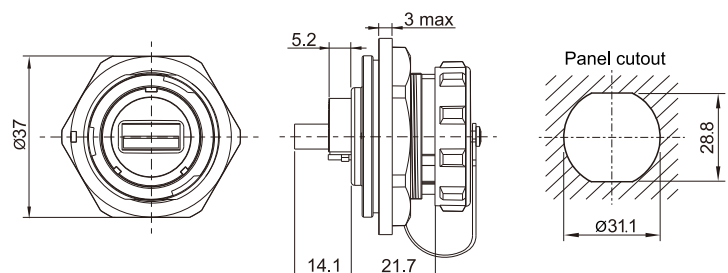

SY25 Series




SY25



Plug with RJ45 adapter
Mate with SY2511, SY2511C,
SY2512, SY2513, SY2515

SY2510/PRJ45

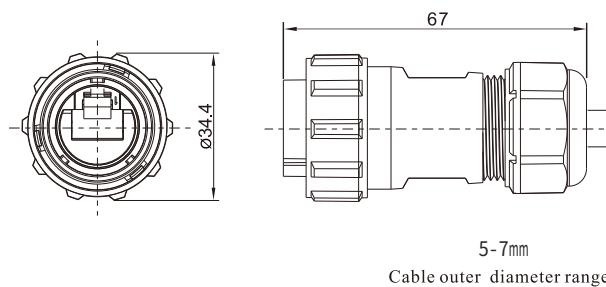


★ Wire length can be customized



Receptacle with RJ45 adapter C
Mate with SY2510

SY2511C/SRJ45

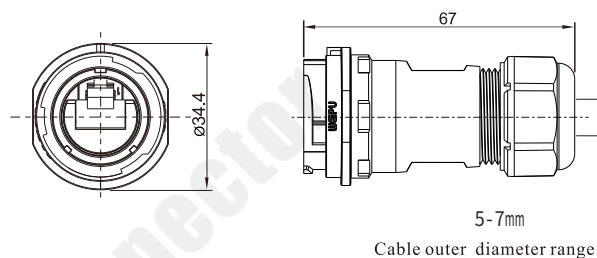


★ Wire length can be customized




Rear-nut mount receptacle
with RJ45 adapter
Mate with SY2510

SY2512/SRJ45

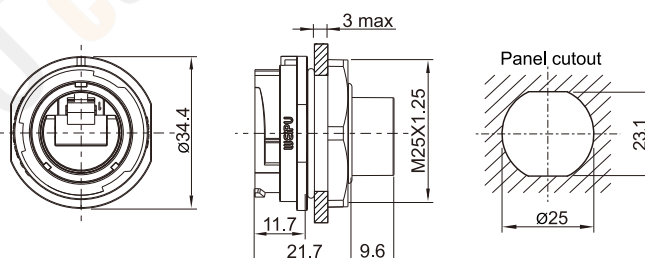


2-hole flange
with RJ45 adapter
Mate with SY2510

SY2513/SRJ45

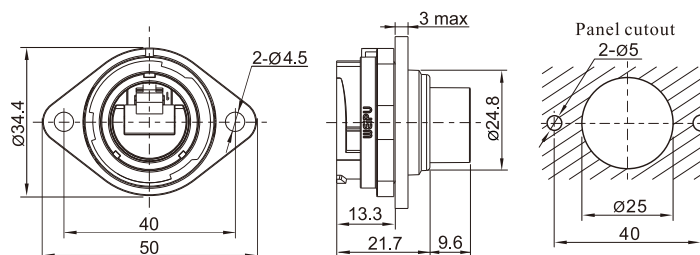

Front-nut mount
with RJ45 adapter
Mate with SY2510

SY2515/SRJ45

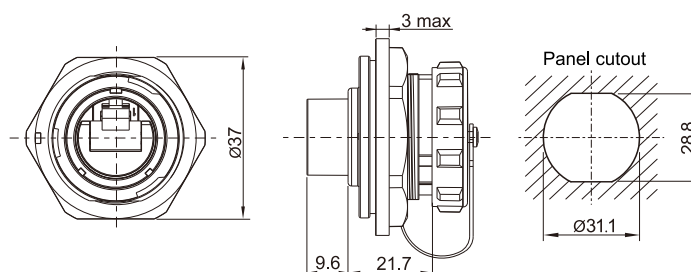

SY25 Series




SY25



SY2510/PHDMI2.0

Plug with HDMI adapter
Mate with SY2511, SY2511C,
SY2512, SY2513, SY2515

Wire length:
0.5m
1.0m
1.5m
2.0m
3.0m

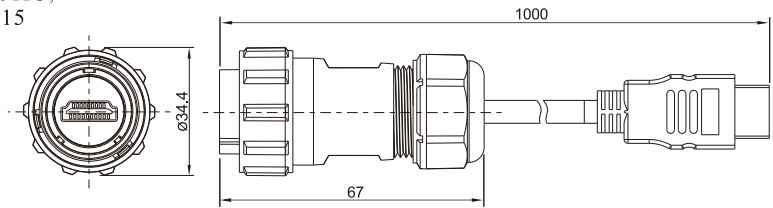


★ Wire length can be customized

06



SY2511C/SHDMI2.0

Receptacle with
HDMI2.0 adapter C
Mate with SY2511, SY2511C,
SY2512, SY2513, SY2515

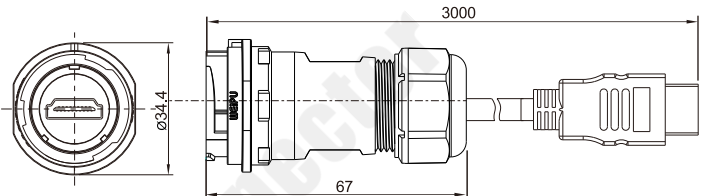


★ Wire length can be customized




SY2512/SHDMI2.0

Rear-nut mount receptacle
with HDMI2.0 adapter
Mate with SY2510

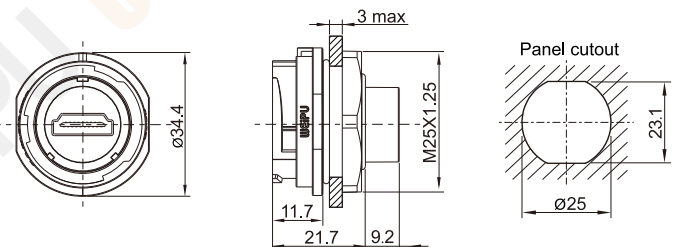

SY2513/SHDMI2.0

2-hole flange
with HDMI2.0 adapter
Mate with SY2510

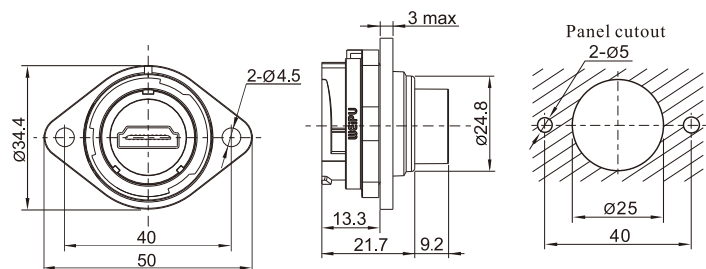

SY2515/SHDMI2.0

Front-nut mount
with HDMI2.0 adapter
Mate with SY2510

