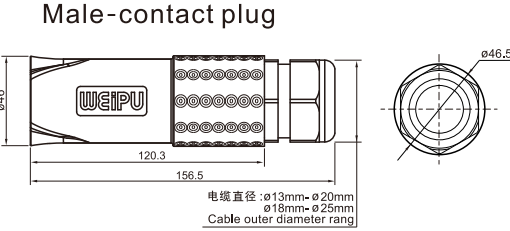

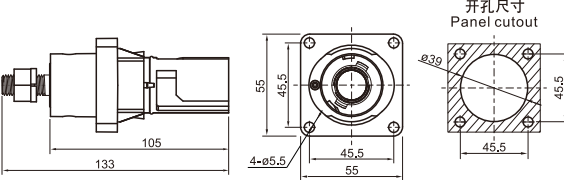



WH400A series IP67


Material and spec

Shell	PA6, UL94 V-0	Insulation resistance (MΩ)	≥500MΩ
Insert material	PA6, UL94 V-0	Test voltage (AC.V) 1 min	3000
Contact material	Brass with silver plating	Rated current (A)	400
Termination	Screw	Rated voltage (AC.V)	600
Mating cycle	500	Contact resistance (mΩ)	≤2.5mΩ
Temperature range	-25℃~+85℃	Wire size (mm²)	50mm², 70mm², 95mm², 120mm²

		Phase sequence	Part number	Colour
		L1	WH400A-TJ-L1-*	Brown
		L2	WH400A-TJ-L2-*	Black
		L3	WH400A-TJ-L3-*	Grey
		N	WH400A-TJ-N-*	Blue
		PE	WH400A-TJ-PE-*	Green
		Notes: "*" is wire size, available in 50mm², 70mm², 95mm², 120mm². For example, for 50mm² and L1, the model number is WH400A-TJ-L1-50.		

		L1	WH400A-ZK-L1	Brown
		L2	WH400A-ZK-L2	Black
		L3	WH400A-ZK-L3	Grey
		N	WH400A-ZK-N	Blue
		PE	WH400A-ZK-PE	Green

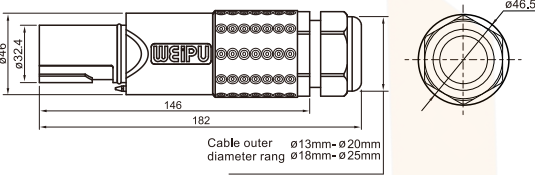		L1	WH400A-TK-L1-*	Brown
		L2	WH400A-TK-L2-*	Black
		L3	WH400A-TK-L3-*	Grey
		N	WH400A-TK-N-*	Blue
		PE	WH400A-TK-PE-*	Green
		Notes: "*" is wire size, available in 50mm², 70mm², 95mm², 120mm². For example, for 50mm² and L1, the model number is WH400A-TK-L1-50.		

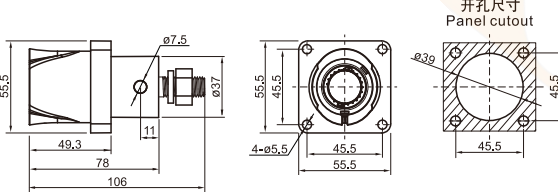		L1	WH400A-ZJ-L1	Brown
		L2	WH400A-ZJ-L2	Black
		L3	WH400A-ZJ-L3	Grey
		N	WH400A-ZJ-N	Blue
		PE	WH400A-ZJ-PE	Green

IP67

WH400A Series

