


DPM Metal Accessories — Circular Blind Plugs – Metric thread

CE RoHS **IP68**



Material: Brass with Nickle plating
IP rating: IP68 with specified mating threads and O-ring
Performance: RoHS compliant



P/N	Thread Size	AG mm	GL mm	ØD mm	H mm	Reference No.	
DPM.M12	M12X1.5	12	6	14	9	9 00 028 0120 0	30
DPM.M16	M16X1.5	16	7	18	10	9 00 028 0160 0	30
DPM.M18	M18X1.5	18	7	21	10	9 00 028 0180 0	30
DPM.M20	M20X1.5	20	7	23	10	9 00 028 0200 0	20
DPM.M22	M22X1.5	22	7	25	10	9 00 028 0220 0	20
DPM.M24	M24X1.5	24	7	27	10	9 00 028 0240 0	20
DPM.M25	M25X1.5	25	7	28	10	9 00 028 0250 0	20
DPM.M32	M32X1.5	32	8	35	12	9 00 028 0320 0	10
DPM.M36	M36X2.0	36	8	39	12	9 00 028 0360 0	10
DPM.M40	M40X1.5	40	9	44	15	9 00 028 0400 0	10
DPM.M48	M48X2.0	48	9	52	15	9 00 028 0480 0	10
DPM.M50	M50X1.5	50	9	55	15	9 00 028 0500 0	5
DPM.M63	M63X1.5	63	10	68	16	9 00 028 0630 0	5

Recommended accessories:




P112

DPM Metal Accessories — Circular Blind Plugs– PG thread

CE RoHS **IP68**

Material: Brass with Nickle plating
 IP rating: IP68 with specified mating threads and O-ring
 Performance: RoHS compliant



P/N	Thread Size	AG mm	GL mm	ØD mm	H mm	Reference No.	
DPM.PG7	PG7	12.5	6	15	9	9 00 028 1070 0	30
DPM.PG9	PG9	15.2	7	18	10	9 00 028 1090 0	30
DPM.PG11	PG11	18.6	7	21	10	9 00 028 1110 0	30
DPM.PG13.5	PG13.5	20.4	7	23	10	9 00 028 1130 0	30
DPM.PG16	PG16	22.5	7	25	10	9 00 028 1160 0	20
DPM.PG21	PG21	28.3	7	32	11	9 00 028 1210 0	20
DPM.PG29	PG29	37	8	40	12	9 00 028 1290 0	10
DPM.PG36	PG36	47	9	50	15	9 00 028 1360 0	10
DPM.PG42	PG42	54	9	59	15	9 00 028 1420 0	5
DPM.PG48	PG48	59.3	10	64	16	9 00 028 1480 0	5

Recommended accessories:




P112

DPM Metal Accessories — Circular Blind Plugs – NPT thread

CE RoHS **IP68**



Material: Brass with Nickle plating
IP rating: IP68 with specified mating threads and O-ring
Performance: RoHS compliant




P/N	Thread Size	AG mm	GL mm	ØD mm	H mm	Reference No.	
DPM.N3/8	N3/8"	16.65	11	21	14.5	9 00 028 3040 0	30
DPM.N1/2	N1/2"	20.85	13	25	16.5	9 00 028 3050 0	30
DPM.N3/4	N3/4"	26.30	13	31	17	9 00 028 3060 0	30
DPM.N1	N1"	33.15	16	35	20	9 00 028 3070 0	20
DPM.N1.1/4	N1-1/4"	41.85	16	47	21	9 00 028 3080 0	20
DPM.N1.1/2	N1-1/2"	47.75	18	52	23	9 00 028 3090 0	10
DPM.N2	N2"	59.55	18	64	24	9 00 028 3100 0	10
DPM.N2.1/2	N2-1/2"	72.30	22	78	28	9 00 028 3110 0	5
DPM.N3	N3"	87.95	22	95	28	9 00 028 3120 0	5

Recommended accessories:




P112

DPM Metal Accessories — Circular Blind Plugs – G Type thread

CE RoHS **IP68**

Material: Brass with Nickle plating
 IP rating: IP68 with specified mating threads and O-ring
 Performance: RoHS compliant



P/N	Thread Size	AG mm	GL mm	ØD mm	H mm	Reference No.	
DPM.G3/8	G3/8"	16.66	8	21	11.5	9 00 028 2030 0	30
DPM.G1/2	G1/2"	20.99	8	25	11.5	9 00 028 2040 0	30
DPM.G3/4	G3/4"	26.44	8	28	12	9 00 028 2060 0	30
DPM.G1	G1"	33.24	9	35	13	9 00 028 2080 0	20
DPM.G1.1/4	G1-1/4"	41.91	10	44	15	9 00 028 2100 0	20
DPM.G1.1/2	G1-1/2"	47.8	10	50	15	9 00 028 2120 0	10
DPM.G2	G2"	59.61	11	54	17	9 00 028 2140 0	10
DPM.G2.1/2	G2-1/2"	75.18	11	80	17	9 00 028 2160 0	5
DPM.G3	G3"	87.88	11	95	18.5	9 00 028 2180 0	5

Recommended accessories:




P112

DPMH Metal Accessories — Hexagonal Blind Plugs – Metric thread

CE RoHS **IP68**



Material: Brass with Nickle plating
IP rating: IP68 with specified mating threads and O-ring
Performance: RoHS compliant

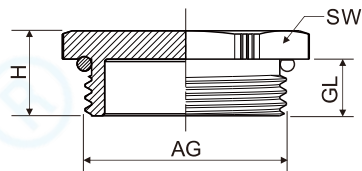

P/N	Thread Size	AG mm	GL mm	H mm	SW mm	Reference No.	
DPMH.M12	M12X1.5	12	6	9	14	9 00 030 0120 0	30
DPMH.M16	M16X1.5	16	7	10	18	9 00 030 0160 0	30
DPMH.M18	M18X1.5	18	7	10.5	20	9 00 030 0180 0	30
DPMH.M20	M20X1.5	20	7	10.5	22	9 00 030 0200 0	20
DPMH.M22	M22X1.5	22	7	10.5	24	9 00 030 0220 0	20
DPMH.M24	M24X1.5	24	7	10.5	27	9 00 030 0240 0	20
DPMH.M25	M25X1.5	25	7	10.5	28	9 00 030 0250 0	20
DPMH.M32	M32X1.5	32	8	12	36	9 00 030 0320 0	10
DPMH.M36	M36X2.0	36	8	12	40	9 00 030 0360 0	10
DPMH.M40	M40X1.5	40	9	14	45	9 00 030 0400 0	10
DPMH.M48	M48X2.0	48	9	14	52	9 00 030 0480 0	10
DPMH.M50	M50X1.5	50	9	14	55	9 00 030 0500 0	5
DPMH.M63	M63X1.5	63	10	16	70	9 00 030 0630 0	5

Recommended accessories:




P112

DPMH Metal Accessories — Hexagonal Blind Plugs – PG thread

CE RoHS **IP68**

Material: Brass with Nickle plating
 IP rating: IP68 with specified mating threads and O-ring
 Performance: RoHS compliant

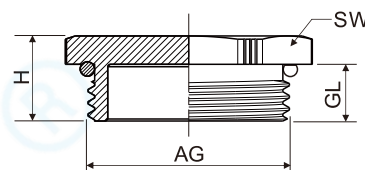

P/N	Thread Size	Thread Size AG	GL mm	H mm	SW mm	Reference No.	
DPMH.PG7	PG7	12.5	6	9	14	9 00 030 1070 0	30
DPMH.PG9	PG9	15.2	7	10	18	9 00 030 1090 0	30
DPMH.PG11	PG11	18.6	7	10.5	20	9 00 030 1110 0	30
DPMH.PG13.5	PG13.5	20.4	7	10.5	22	9 00 030 1130 0	30
DPMH.PG16	PG16	22.5	7	10.5	26	9 00 030 1160 0	20
DPMH.PG21	PG21	28.3	7	11	32	9 00 030 1210 0	20
DPMH.PG29	PG29	37	8	12	40	9 00 030 1290 0	10
DPMH.PG36	PG36	47	9	14	50	9 00 030 1360 0	10
DPMH.PG42	PG42	54	9	14	57	9 00 030 1420 0	5
DPMH.PG48	PG48	59.3	10	16	64	9 00 030 1480 0	5

Recommended accessories:




P112

DPMH Metal Accessories — Hexagonal Blind Plugs – NPT thread

CE RoHS **IP68**



Material: Brass with Nickle plating
IP rating: IP68 with specified mating threads and O-ring
Performance: RoHS compliant

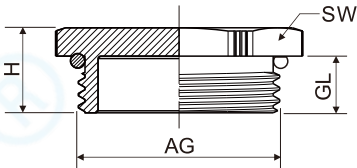

P/N	Thread Size	AG mm	GL mm	H mm	SW mm	Reference No.	
DPMH.N3/8	N3/8"	16.65	11	14.5	20	9 00 030 3040 0	30
DPMH.N1/2	N1/2"	20.85	13	16.5	24	9 00 030 3050 0	30
DPMH.N3/4	N3/4"	26.30	13	17	29	9 00 030 3060 0	30
DPMH.N1	N1"	33.15	16	20	36	9 00 030 3070 0	20
DPMH.N1.1/4	N1-1/4"	41.85	16	21	45	9 00 030 3080 0	20
DPMH.N1.1/2	N1-1/2"	47.75	18	23	50	9 00 030 3090 0	10
DPMH.N2	N2"	59.55	18	24	64	9 00 030 3100 0	10
DPMH.N2.1/2	N2-1/2"	72.30	22	28	75	9 00 030 3110 0	5
DPMH.N3	N3"	87.95	22	28	95	9 00 030 3120 0	5

Recommended accessories:




P112

DPMH Metal Accessories — Hexagonal Blind Plugs – G Type thread

CE RoHS **IP68**

Material: Brass with Nickle plating
 IP rating: IP68 with specified mating threads and O-ring
 Performance: RoHS compliant

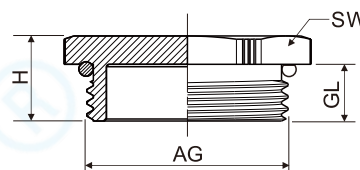

P/N	Thread Size	Thread Size AG	GL mm	H mm	SW mm	Reference No.	
DPMH.G3/8	G3/8"	16.66	8	11.5	20	9 00 030 2030 0	30
DPMH.G1/2	G1/2"	20.99	8	11.5	24	9 00 030 2040 0	30
DPMH.G3/4	G3/4"	26.44	8	12	29	9 00 030 2060 0	30
DPMH.G1	G1"	33.24	9	13	36	9 00 030 2080 0	20
DPMH.G1.1/4	G1-1/4"	41.91	10	15	45	9 00 030 2100 0	20
DPMH.G1.1/2	G1-1/2"	47.8	10	15	50	9 00 030 2120 0	10
DPMH.G2	G2"	59.61	11	17	64	9 00 030 2140 0	10
DPMH.G2.1/2	G2-1/2"	75.18	11	17	80	9 00 030 2160 0	5
DPMH.G3	G3"	87.88	11	18.5	90	9 00 030 2180 0	5

Recommended accessories:




P112

DPMS Metal Accessories — Stainless Steel Circular Blind Plugs – Metric thread

CE RoHS **IP68**



Material: SUS 304
IP rating: IP68 with specified mating threads and O-ring
Performance: RoHS compliant



P/N	Thread Size	AG mm	GL mm	ØD mm	H mm	Reference No.	
DPMS.M12	M12X1.5	12	6	14	9	9 00 029 0120 0	30
DPMS.M16	M16X1.5	16	7	18	10	9 00 029 0160 0	30
DPMS.M18	M18X1.5	18	7	21	10	9 00 029 0180 0	30
DPMS.M20	M20X1.5	20	7	23	10	9 00 029 0200 0	20
DPMS.M22	M22X1.5	22	7	25	10	9 00 029 0220 0	20
DPMS.M24	M24X1.5	24	7	27	10	9 00 029 0240 0	20
DPMS.M25	M25X1.5	25	7	28	10	9 00 029 0250 0	20
DPMS.M32	M32X1.5	32	8	35	12	9 00 029 0320 0	10
DPMS.M36	M36X2.0	36	8	39	12	9 00 029 0360 0	10
DPMS.M40	M40X1.5	40	9	44	15	9 00 029 0400 0	10
DPMS.M48	M48X2.0	48	9	52	15	9 00 029 0480 0	10
DPMS.M50	M50X1.5	50	9	55	15	9 00 029 0500 0	5
DPMS.M63	M63X1.5	63	10	68	16	9 00 029 0630 0	5

Recommended accessories:




P112

DPMS Metal Accessories — Stainless Steel Circular Blind Plugs – PG thread

CE RoHS **IP68**



Material: SUS 304
IP rating: IP68 with specified mating threads and O-ring
Performance: RoHS compliant



P/N	Thread Size	AG mm	GL mm	ØD mm	H mm	Reference No.	
DPMS.PG7	PG7	12.5	6	14	9	9 00 029 1070 0	30
DPMS.PG9	PG9	15.2	7	18	10	9 00 029 1090 0	30
DPMS.PG11	PG11	18.6	7	21	10	9 00 029 1110 0	30
DPMS.PG13.5	PG13.5	20.4	7	23	10	9 00 029 1130 0	30
DPMS.PG16	PG16	22.5	7	25	10	9 00 029 1160 0	20
DPMS.PG21	PG21	28.3	7	32	11	9 00 029 1210 0	20
DPMS.PG29	PG29	37	8	40	12	9 00 029 1290 0	10
DPMS.PG36	PG36	47	9	50	15	9 00 029 1360 0	10
DPMS.PG42	PG42	54	9	59	15	9 00 029 1420 0	5
DPMS.PG48	PG48	59.3	10	64	16	9 00 029 1480 0	5

Recommended accessories:




P112

DPMS Metal Accessories — Stainless Steel Circular Blind Plugs – NPT thread

CE RoHS **IP68**



Material: SUS 304
IP rating: IP68 with specified mating threads and O-ring
Performance: RoHS compliant



P/N	Thread Size	AG mm	GL mm	ØD mm	H mm	Reference No.	
DPMS.N3/8	N3/8"	16.65	11	21	14.5	9 00 029 3040 0	30
DPMS.N1/2	N1/2"	20.85	13	25	16.5	9 00 029 3050 0	30
DPMS.N3/4	N3/4"	26.30	13	30	17	9 00 029 3060 0	30
DPMS.N1	N1"	33.15	16	38	20	9 00 029 3070 0	20
DPMS.N1.1/4	N1-1/4"	41.85	16	47	21	9 00 029 3080 0	20
DPMS.N1.1/2	N1-1/2"	47.75	18	52	23	9 00 029 3090 0	10
DPMS.N2	N2"	59.55	18	64	24	9 00 029 3100 0	10
DPMS.N2.1/2	N2-1/2"	72.30	22	78	28	9 00 029 3110 0	5
DPMS.N3	N3"	87.95	22	95	28	9 00 029 3120 0	5

Recommended accessories:



P112

DPMS Metal Accessories — Stainless Steel Circular Blind Plugs – G Type thread


CE RoHS **IP68**



Material: SUS 304

IP rating: IP68 with specified mating threads and O-ring

Performance: RoHS compliant



P/N	Thread Size	AG mm	GL mm	ØD mm	H mm	Reference No.	
DPMS.G3/8	G3/8"	16.66	8	21	11.5	9 00 029 2030 0	30
DPMS.G1/2	G1/2"	20.99	8	25	11.5	9 00 029 2040 0	30
DPMS.G3/4	G3/4"	26.44	8	30	12	9 00 029 2060 0	30
DPMS.G1	G1"	33.24	9	38	13	9 00 029 2080 0	20
DPMS.G1.1/4	G1-1/4"	41.91	10	47	15	9 00 029 2100 0	20
DPMS.G1.1/2	G1-1/2"	47.8	10	52	15	9 00 029 2120 0	10
DPMS.G2	G2"	59.61	11	65	17	9 00 029 2140 0	10
DPMS.G2.1/2	G2-1/2"	75.18	11	80	17	9 00 029 2160 0	5
DPMS.G3	G3"	87.88	11	95	18.5	9 00 029 2180 0	5

Recommended accessories:




P112

DPMHS Metal Accessories — Stainless Steel Hexagonal Blind Plugs – Metric thread

CE RoHS **IP68**



Material: SUS 304
 IP rating: IP68 with specified mating threads and O-ring
 Performance: RoHS compliant



P/N	Thread Size	AG mm	GL mm	H mm	SW mm	Reference No.	
DPMHS.M12	M12X1.5	12	6	9	14	9 00 031 0120 0	30
DPMHS.M16	M16X1.5	16	7	10	18	9 00 031 0160 0	30
DPMHS.M18	M18X1.5	18	7	10.5	20	9 00 031 0180 0	30
DPMHS.M20	M20X1.5	20	7	10.5	22	9 00 031 0200 0	20
DPMHS.M22	M22X1.5	22	7	10.5	24	9 00 031 0220 0	20
DPMHS.M24	M24X1.5	24	7	10.5	27	9 00 031 0240 0	20
DPMHS.M25	M25X1.5	25	7	10.5	29	9 00 031 0250 0	20
DPMHS.M32	M32X1.5	32	8	12	36	9 00 031 0320 0	10
DPMHS.M36	M36X2.0	36	8	12	40	9 00 031 0360 0	10
DPMHS.M40	M40X1.5	40	9	14	45	9 00 031 0400 0	10
DPMHS.M48	M48X2.0	48	9	14	52	9 00 031 0480 0	10
DPMHS.M50	M50X1.5	50	9	14	55	9 00 031 0500 0	5
DPMHS.M63	M63X1.5	63	10	16	70	9 00 031 0630 0	5

Recommended accessories:




P112

DPMHS Metal Accessories — Stainless Steel Hexagonal Blind Plugs – PG thread

CE RoHS **IP68**

Material: SUS 304
 IP rating: IP68 with specified mating threads and O-ring
 Performance: RoHS compliant

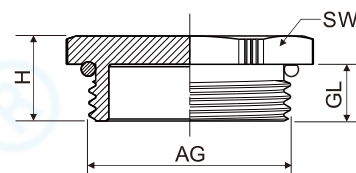

P/N	Thread Size	AG mm	GL mm	H mm	SW mm	Reference No.	
DPMHS.PG7	PG7	12.5	6	9	14	9 00 031 1070 0	30
DPMHS.PG9	PG9	15.2	7	10	18	9 00 031 1090 0	30
DPMHS.PG11	PG11	18.6	7	10.5	21	9 00 031 1110 0	30
DPMHS.PG13.5	PG13.5	20.4	7	10.5	23	9 00 031 1130 0	30
DPMHS.PG16	PG16	22.5	7	10.5	26	9 00 031 1160 0	20
DPMHS.PG21	PG21	28.3	7	11	32	9 00 031 1210 0	20
DPMHS.PG29	PG29	37	8	12	40	9 00 031 1290 0	10
DPMHS.PG36	PG36	47	9	14	50	9 00 031 1360 0	10
DPMHS.PG42	PG42	54	9	14	58	9 00 031 1420 0	5
DPMHS.PG48	PG48	59.3	10	16	65	9 00 031 1480 0	5

Recommended accessories:




P112

DPMHS Metal Accessories — Stainless Steel Hexagonal Blind Plugs – NPT thread

CE RoHS **IP68**



Material: SUS 304
IP rating: IP68 with specified mating threads and O-ring
Performance: RoHS compliant



P/N	Thread Size	AG mm	GL mm	H mm	SW mm	Reference No.	
DPMHS.N3/8	N3/8"	16.65	11	14.5	20	9 00 031 3040 0	30
DPMHS.N1/2	N1/2"	20.85	13	16.5	23	9 00 031 3050 0	30
DPMHS.N3/4	N3/4"	26.30	13	17	30	9 00 031 3060 0	30
DPMHS.N1	N1"	33.15	16	20	38	9 00 031 3070 0	20
DPMHS.N1.1/4	N1-1/4"	41.85	16	21	50	9 00 031 3080 0	20
DPMHS.N1.1/2	N1-1/2"	47.75	18	23	52	9 00 031 3090 0	10
DPMHS.N2	N2"	59.55	18	24	65	9 00 031 3100 0	10
DPMHS.N2.1/2	N2-1/2"	72.30	22	28	75	9 00 031 3110 0	5
DPMHS.N3	N3"	87.95	22	28	95	9 00 031 3120 0	5

Recommended accessories:




P112

DPMHS Metal Accessories — Stainless Steel Hexagonal Blind Plugs – G Type thread

CE RoHS **IP68**



Material: SUS 304
IP rating: IP68 with specified mating threads and O-ring
Performance: RoHS compliant

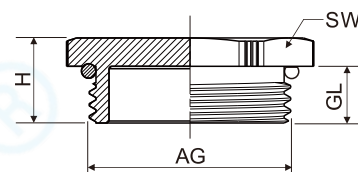

P/N	Thread Size	AG mm	GL mm	H mm	SW mm	Reference No.	
DPMHS.G3/8	G3/8"	16.66	8	11.5	20	9 00 031 2030 0	30
DPMHS.G1/2	G1/2"	20.99	8	11.5	24	9 00 031 2040 0	30
DPMHS.G3/4	G3/4"	26.44	8	12	29	9 00 031 2060 0	30
DPMHS.G1	G1"	33.24	9	13	38	9 00 031 2080 0	20
DPMHS.G1.1/4	G1-1/4"	41.91	10	15	50	9 00 031 2100 0	20
DPMHS.G1.1/2	G1-1/2"	47.8	10	15	52	9 00 031 2120 0	10
DPMHS.G2	G2"	59.61	11	17	65	9 00 031 2140 0	10
DPMHS.G2.1/2	G2-1/2"	75.18	11	17	80	9 00 031 2160 0	5
DPMHS.G3	G3"	87.88	11	18.5	95	9 00 031 2180 0	5

Recommended accessories:



P112