



REM Metal Accessories — Reducers— Metric thread

CE RoHS **IP68**

Material: Brass with Nickle plating
 IP rating: IP68 with specified mating threads and O-ring
 Performance: RoHS compliant



Type A



Type B



P/N	Thread Size AG	Thread Size IG	GL mm	GL2 mm	H mm	SW mm	Type	Reference No.	
REM.M16	M16X1.5	M12X1.5	7	/	9.5	18	A	9 00 032 0160 0	30
REM.M18	M18X1.5	M16X1.5	7	12	20.5	20	B	9 00 032 0180 0	30
REM.M20.A	M20X1.5	M16X1.5	7	/	10	24	A	9 00 032 0200 0	30
REM.M20.B	M20X1.5	M18X1.5	7	12	21	24	B	9 00 032 0201 0	30
REM.M24	M24X1.5	M20X1.5	7	/	10.5	26	A	9 00 032 0240 0	20
REM.M25	M25X1.5	M20X1.5	7	/	10.5	29	A	9 00 032 0250 0	20
REM.M27	M27X2.0	M25X1.5	8	14	24	30	B	9 00 032 0270 0	15
REM.M30	M30X2.0	M27X2.0	8	14	24	32	B	9 00 032 0300 0	15
REM.M32	M32X1.5	M25X1.5	8	/	12	36	A	9 00 032 0320 0	20
REM.M36	M36X2.0	M32X1.5	8	/	12	40	A	9 00 032 0360 0	10
REM.M40	M40X1.5	M32X1.5	9	/	13	45	A	9 00 032 0400 0	10
REM.M50	M50X1.5	M40X1.5	9	/	14	55	A	9 00 032 0500 0	5
REM.M63	M63X1.5	M50X1.5	10	/	16	68	A	9 00 032 0630 0	5

Recommended accessories:



P112

REM Metal Accessories — Reducers— PG thread

CE RoHS **IP68**

Material: Brass with Nickle plating
 IP rating: IP68 with specified mating threads and O-ring
 Performance: RoHS compliant

P/N	Thread Size AG	Thread Size IG	GL mm	H mm	SW mm	Reference No.	
REM.PG9	PG9	PG7	7	10	18	9 00 032 1090 0	30
REM.PG11	PG11	PG9	7	10.5	21	9 00 032 1110 0	30
REM.PG13.5	PG13.5	PG11	7	10.5	23	9 00 032 1130 0	30
REM.PG16	PG16	PG13.5	7	10.5	26	9 00 032 1160 0	20
REM.PG21	PG21	PG16	7	11	30	9 00 032 1210 0	20
REM.PG29	PG29	PG21	8	13	40	9 00 032 1290 0	10
REM.PG36	PG36	PG29	9	14	50	9 00 032 1360 0	10
REM.PG42	PG42	PG36	10	15	55	9 00 032 1420 0	5
REM.PG48	PG48	PG42	10	16	64	9 00 032 1480 0	5

Recommended accessories:




P112

REM Metal Accessories — Reducers– NPT thread

CE RoHS **IP68**



Material: Brass with Nickle plating
IP rating: IP68 with specified mating threads and O-ring
Performance: RoHS compliant




P/N	Thread Size AG	Thread Size IG	GL mm	H mm	SW mm	Reference No.	
REM.N1/2	N1/2"	N3/8"	7	10	24	9 00 032 3050 0	30
REM.N3/4	N3/4"	N1/2"	7	10.5	30	9 00 032 3060 0	30
REM.N1	N1"	N3/4"	7	11	38	9 00 032 3070 0	20
REM.N1.1/4	N1-1/4"	N1"	9	12	50	9 00 032 3080 0	20
REM.N1.1/2	N1-1/2"	N1-1/4"	10	14	52	9 00 032 3090 0	10
REM.N2	N2"	N1-1/2"	11	15	65	9 00 032 3100 0	10
REM.N2.1/2	N2-1/2"	N2"	11	16	80	9 00 032 3110 0	5
REM.N3	N3"	N2-1/2"	11	18	95	9 00 032 3120 0	5

Recommended accessories:




P112

REM Metal Accessories — Reducers— G Type thread

CE RoHS **IP68**

Material: Brass with Nickle plating
 IP rating: IP68 with specified mating threads and O-ring
 Performance: RoHS compliant



P/N	Thread Size AG	Thread Size IG	GL mm	H mm	SW mm	Reference No.	
REM.G1/2	G1/2"	G3/8"	7	10	24	9 00 032 2040 0	30
REM.G3/4	G3/4"	G1/2"	7	10.5	30	9 00 032 2060 0	30
REM.G1	G1"	G3/4"	7	11	38	9 00 032 2080 0	30
REM.G1.1/4	G1-1/4"	G1"	9	12	50	9 00 032 2100 0	20
REM.G1.1/2	G1-1/2"	G1-1/4"	10	14	52	9 00 032 2120 0	20
REM.G2	G2"	G1-1/2"	11	15	65	9 00 032 2140 0	10
REM.G2.1/2	G2-1/2"	G2"	11	16	80	9 00 032 2160 0	5
REM.G2	G2"	G3"	11	18	95	9 00 032 2180 0	5

Recommended accessories:




P112

REMS Metal Accessories — Stainless Steel Reducers– Metric thread

CE RoHS **IP68**



Material: SUS 304
IP rating: IP68 with specified mating threads and O-ring
Performance: RoHS compliant

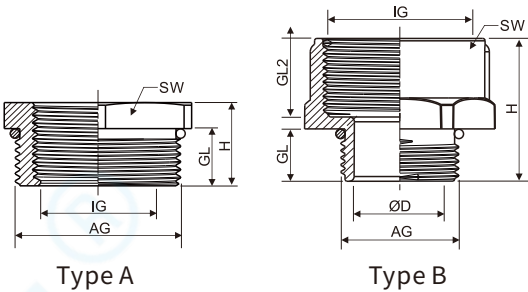

P/N	Thread Size AG	Thread Size IG	GL mm	GL2 mm	H mm	SW mm	Type	Reference No.	
REMS.M16	M16X1.5	M12X1.5	7	/	9.5	18	A	900 033 01600	30
REMS.M18	M18X1.5	M16X1.5	7	12	20.5	20	B	900 033 01800	30
REMS.M20.A	M20X1.5	M16X1.5	7	/	10	24	A	900 033 02000	30
REMS.M20.B	M20X1.5	M18X1.5	7	12	21	24	B	900 033 02010	30
REMS.M24	M24X1.5	M20X1.5	7	/	10.5	27	A	900 033 02400	20
REMS.M25	M25X1.5	M20X1.5	7	/	10.5	28	A	900 033 02500	20
REMS.M27	M27X2.0	M25X1.5	8	14	24	30	B	900 033 02700	15
REMS.M30	M30X2.0	M27X2.0	8	14	24	34	B	900 033 03000	15
REMS.M32	M32X1.5	M25X1.5	8	/	12	36	A	900 033 03200	20
REMS.M36	M36X2.0	M32X1.5	8	/	12	40	A	900 033 03600	10
REMS.M40	M40X1.5	M32X1.5	9	/	13	45	A	900 033 04000	10
REMS.M50	M50X1.5	M40X1.5	9	/	14	55	A	900 033 05000	5
REMS.M63	M63X1.5	M50X1.5	10	/	16	70	A	900 033 06300	5

Recommended accessories:




P112

REMS Metal Accessories — Stainless Steel Reducers– PG thread

CE RoHS **IP68**

Material: SUS 304
 IP rating: IP68 with specified mating threads and O-ring
 Performance: RoHS compliant




P/N	Thread Size AG	Thread Size IG	GL mm	H mm	SW mm	Reference No.	
REMS.PG9	PG9	PG7	7	10	18	900 033 10900	30
REMS.PG11	PG11	PG9	7	10.5	21	900 033 11100	30
REMS.PG13.5	PG13.5	PG11	7	10.5	23	900 033 11300	30
REMS.PG16	PG16	PG13.5	7	10.5	26	900 033 11600	20
REMS.PG21	PG21	PG16	7	11	32	900 033 12100	20
REMS.PG29	PG29	PG21	8	13	45	900 033 12900	10
REMS.PG36	PG36	PG29	9	14	50	900 033 13600	10
REMS.PG42	PG42	PG36	10	15	55	900 033 14200	5
REMS.PG48	PG48	PG42	10	16	65	900 033 14800	5

Recommended accessories:



P112

REMS Metal Accessories — Stainless Steel Reducers– NPT thread

CE RoHS **IP68**

Material: SUS 304
 IP rating: IP68 with specified mating threads and O-ring
 Performance: RoHS compliant

P/N	Thread Size AG	Thread Size IG	GL mm	H mm	SW mm	Reference No.	
REMS.N1/2	N1/2"	N3/8"	7	10	24	9 00 033 3050 0	30
REMS.N3/4	N3/4"	N1/2"	7	10.5	30	9 00 033 3060 0	30
REMS.N1	N1"	N3/4"	7	11	38	9 00 033 3070 0	20
REMS.N1.1/4	N1-1/4"	N1"	9	12	50	9 00 033 3080 0	20
REMS.N1.1/2	N1-1/2"	N1-1/4"	10	14	52	9 00 033 3090 0	10
REMS.N2	N2"	N1-1/2"	11	15	65	9 00 033 3100 0	10
REMS.N2.1/2	N2-1/2"	N2"	11	16	80	9 00 033 3110 0	5
REMS.N3	N3"	N2-1/2"	11	18	95	9 00 033 3120 0	5

Recommended accessories:




P112

REMS Metal Accessories — Stainless Steel Reducers– G Type thread

CE RoHS **IP68**

Material: SUS 304
 IP rating: IP68 with specified mating threads and O-ring
 Performance: RoHS compliant



P/N	Thread Size AG	Thread Size IG	GL mm	H mm	SW mm	Reference No.	
REMS.G1/2	G1/2"	G3/8"	7	10	24	9 00 033 2040 0	30
REMS.G3/4	G3/4"	G1/2"	7	10.5	30	9 00 033 2060 0	30
REMS.G1	G1"	G3/4"	7	11	38	9 00 033 2080 0	30
REMS.G1.1/4	G1-1/4"	G1"	9	12	50	9 00 033 2100 0	20
REMS.G1.1/2	G1-1/2"	G1-1/4"	10	14	52	9 00 033 2120 0	20
REMS.G2.A	G2"	G1-1/2"	11	15	65	9 00 033 2140 0	10
REMS.G2.1/2	G2-1/2"	G2"	11	16	80	9 00 033 2160 0	5
REMS.G2.B	G2"	G3"	11	18	95	9 00 033 2141 0	5

Recommended accessories:



P112